





RoHS COMPLIANT

REVISIONS



REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE
A		ISSUE A	JASON MENG	2007-12-17

5.TABLE:

POS.	PART NO.	DIMENSIONS				
		A	B	C	D	E
05	1BF4XX010XKX1	8.00	14.35	19.0	22.0	13.00
06	1BF4XX011XKX1	10.00	16.35	21.0	24.0	15.00
07	1BF4XX009XKX1	12.00	18.35	23.0	26.0	17.00
08	1BF4XX012XKX1	14.00	20.35	25.0	28.0	19.00
09	1BF4XX013XKX1	16.00	22.35	27.0	30.0	21.00
10	1BF4XX014XKX1	18.00	24.35	29.0	32.0	23.00

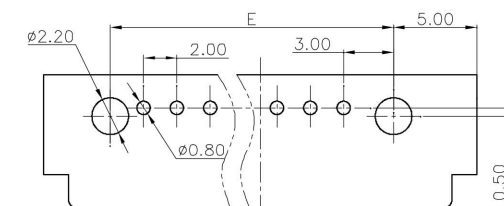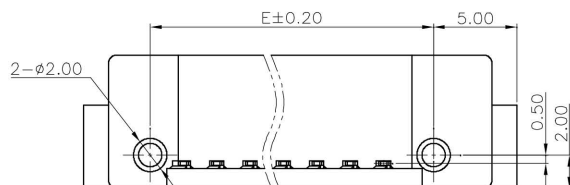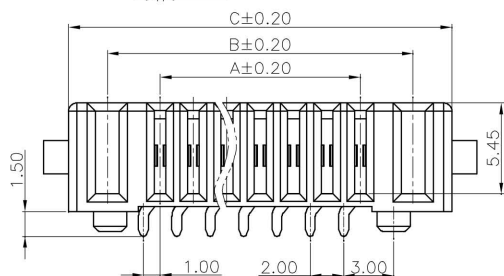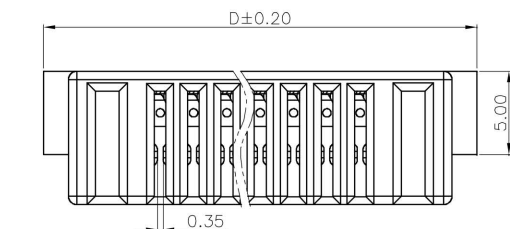

RECOMMEND PCB LAYOUT
TOLERANCES:±0.05



NOTE:

1.MATERIAL:
HOUSING: HIGH TEMPARTURE THERMO PLASTIC UL 94V-0
CONTACT: COPPER ALLOY.

2.FINISH:
CONTACT: GOLD (SEE TABLE) PLATED ON THE 50μ" MIN.
NICKEL UNPLATED OVER ALL.

3.PCB THICKNESS: 0.8mm.

4. P/N DESCRIPTION :

J21815-1BF4 XX XXX X K X 1

(1) (2) (3)
SEE TABLE

(1):PLATING:11-FLASH.GOLD ON THE CONTACT AREA;
12-3μ"MIN. GOLD ON THE CONTACT AREA

(2):"R":RoHS; "G":GP;

(3):PACKING: C-TRAY WITHOUT CAP

DIMENSIONS:			
☐ MM	☐ INCH	☒ MM	☐ ONLY
[INCH]	[MM]		

UNLESS OTHERWISE SPECIFIED,
GENERAL TOLERANCE:

DECIMALS	ANGLES
X. ±0.38 [0.015]	X° ±3°
.X ±0.25 [0.010]	.X° ±1.0°
.XX ±0.13 [0.005]	

CAD GENERATED DRAWING,
DO NOT MANUALLY UPDATE

THIRD ANGLE PROJECTION



SoniTexx®

TITLE BATTERY FEMALE R/A DIP TYPE(PH=2.00mm平柱)

PART NO. J21815-1BF4XXXXXXKX1 APPROVED BY JASON MENG

DRAWING NO. J21815-1BF4XXXXXXKX1 CHECKED BY STEVEN LIU

MATERIAL DRAWN BY Darren Xia

FINISH GENERATD DATE 2010-06-02

SCALE SHEET REV. SIZE: A4
FREE 1/1 A FILE NO.:JJP-A-05-003

DO NOT SCALE DRAWING