

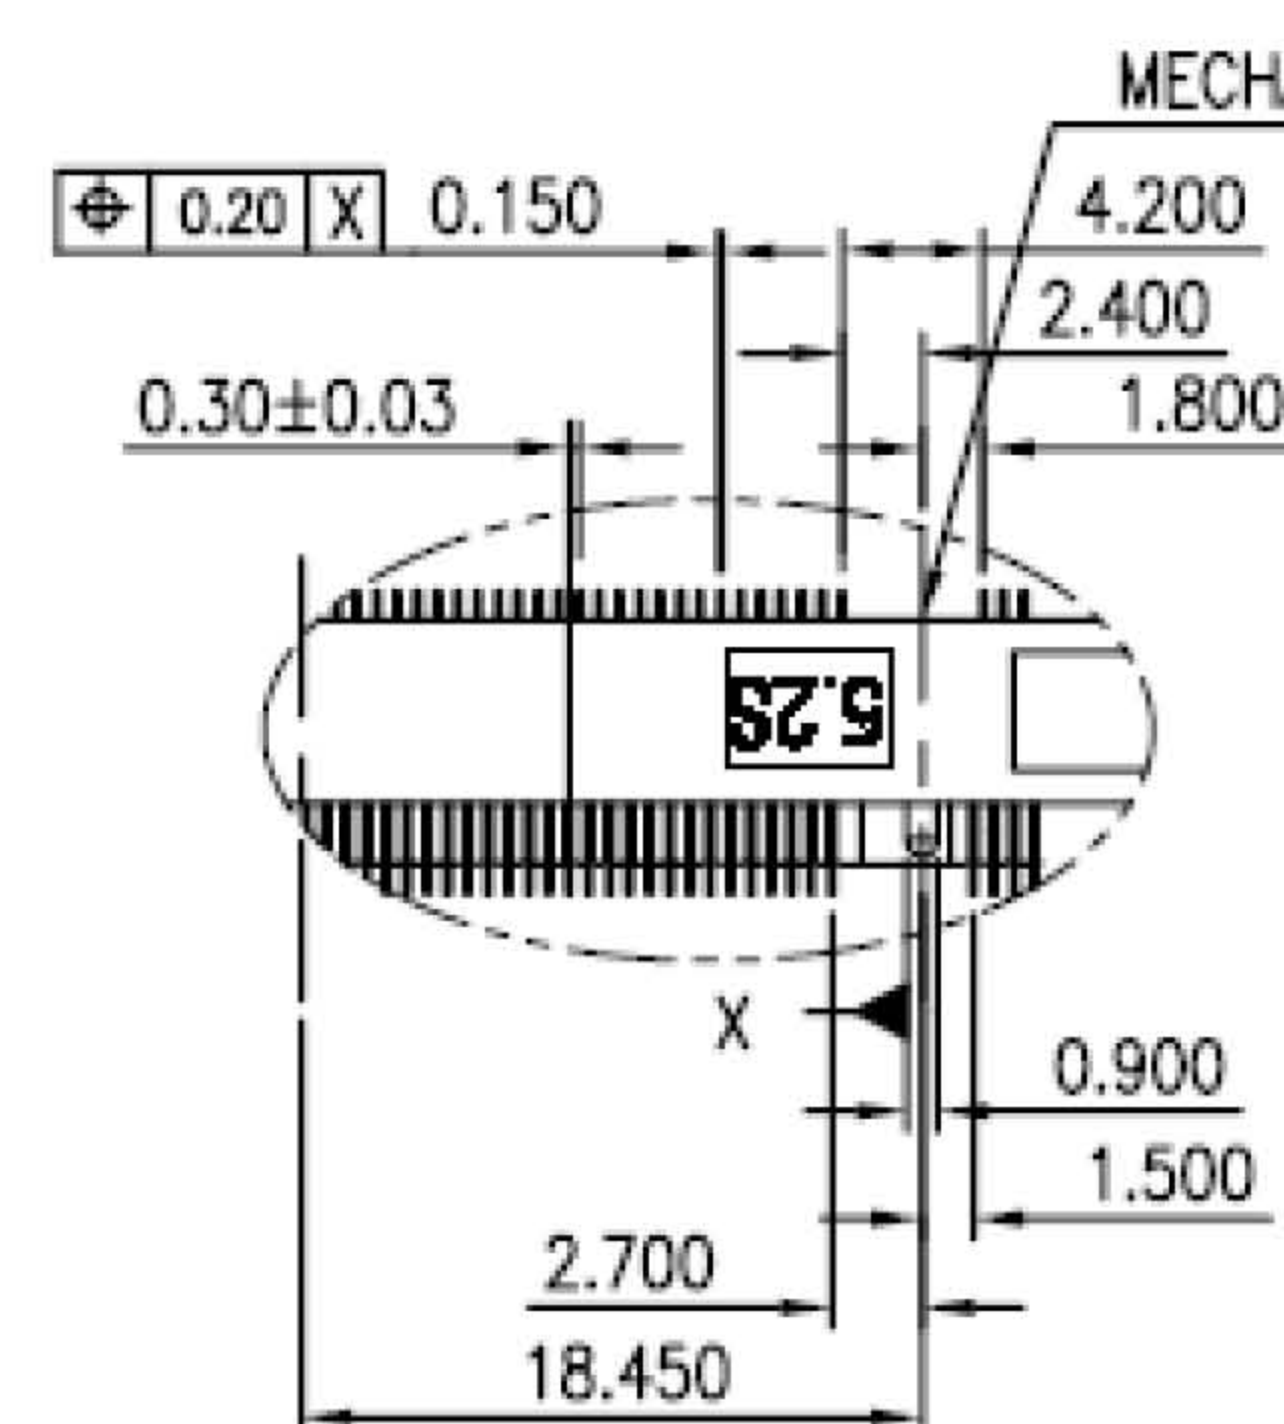
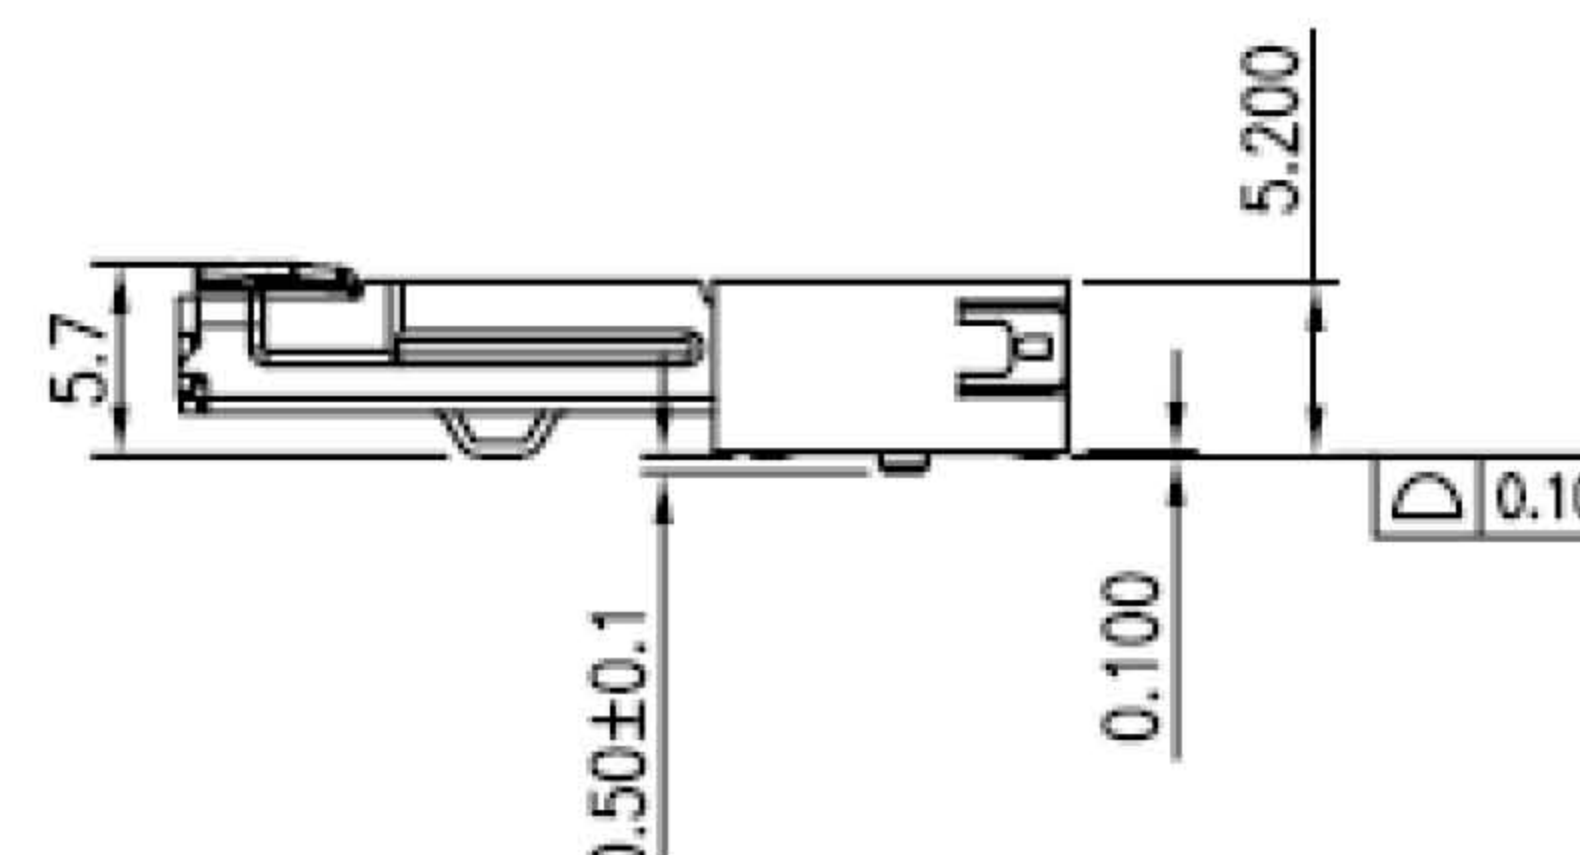
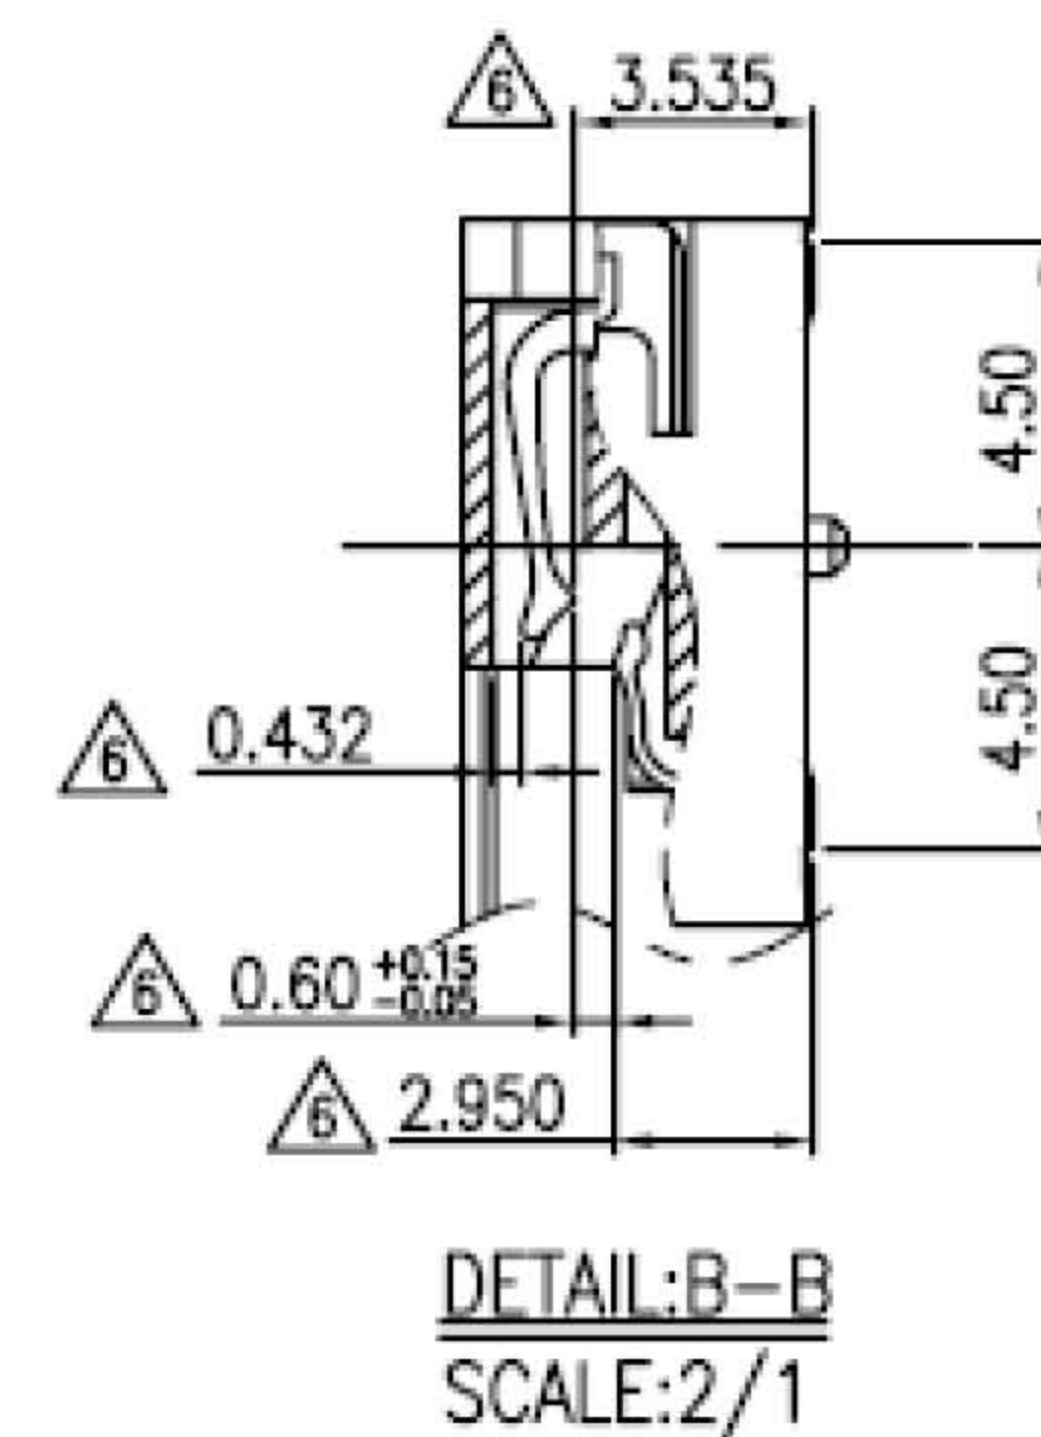
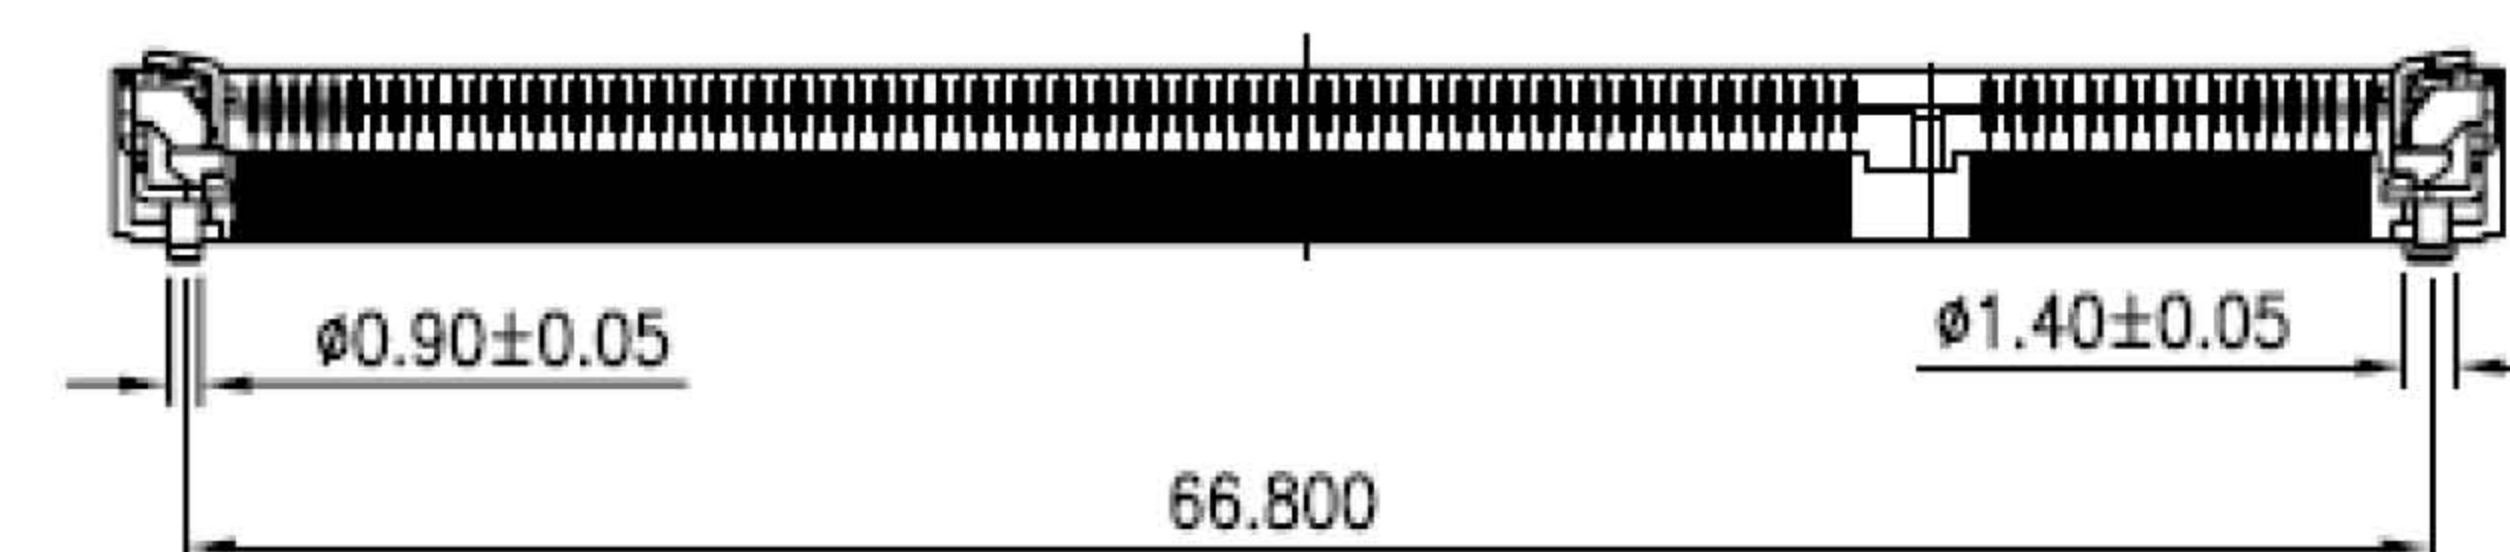


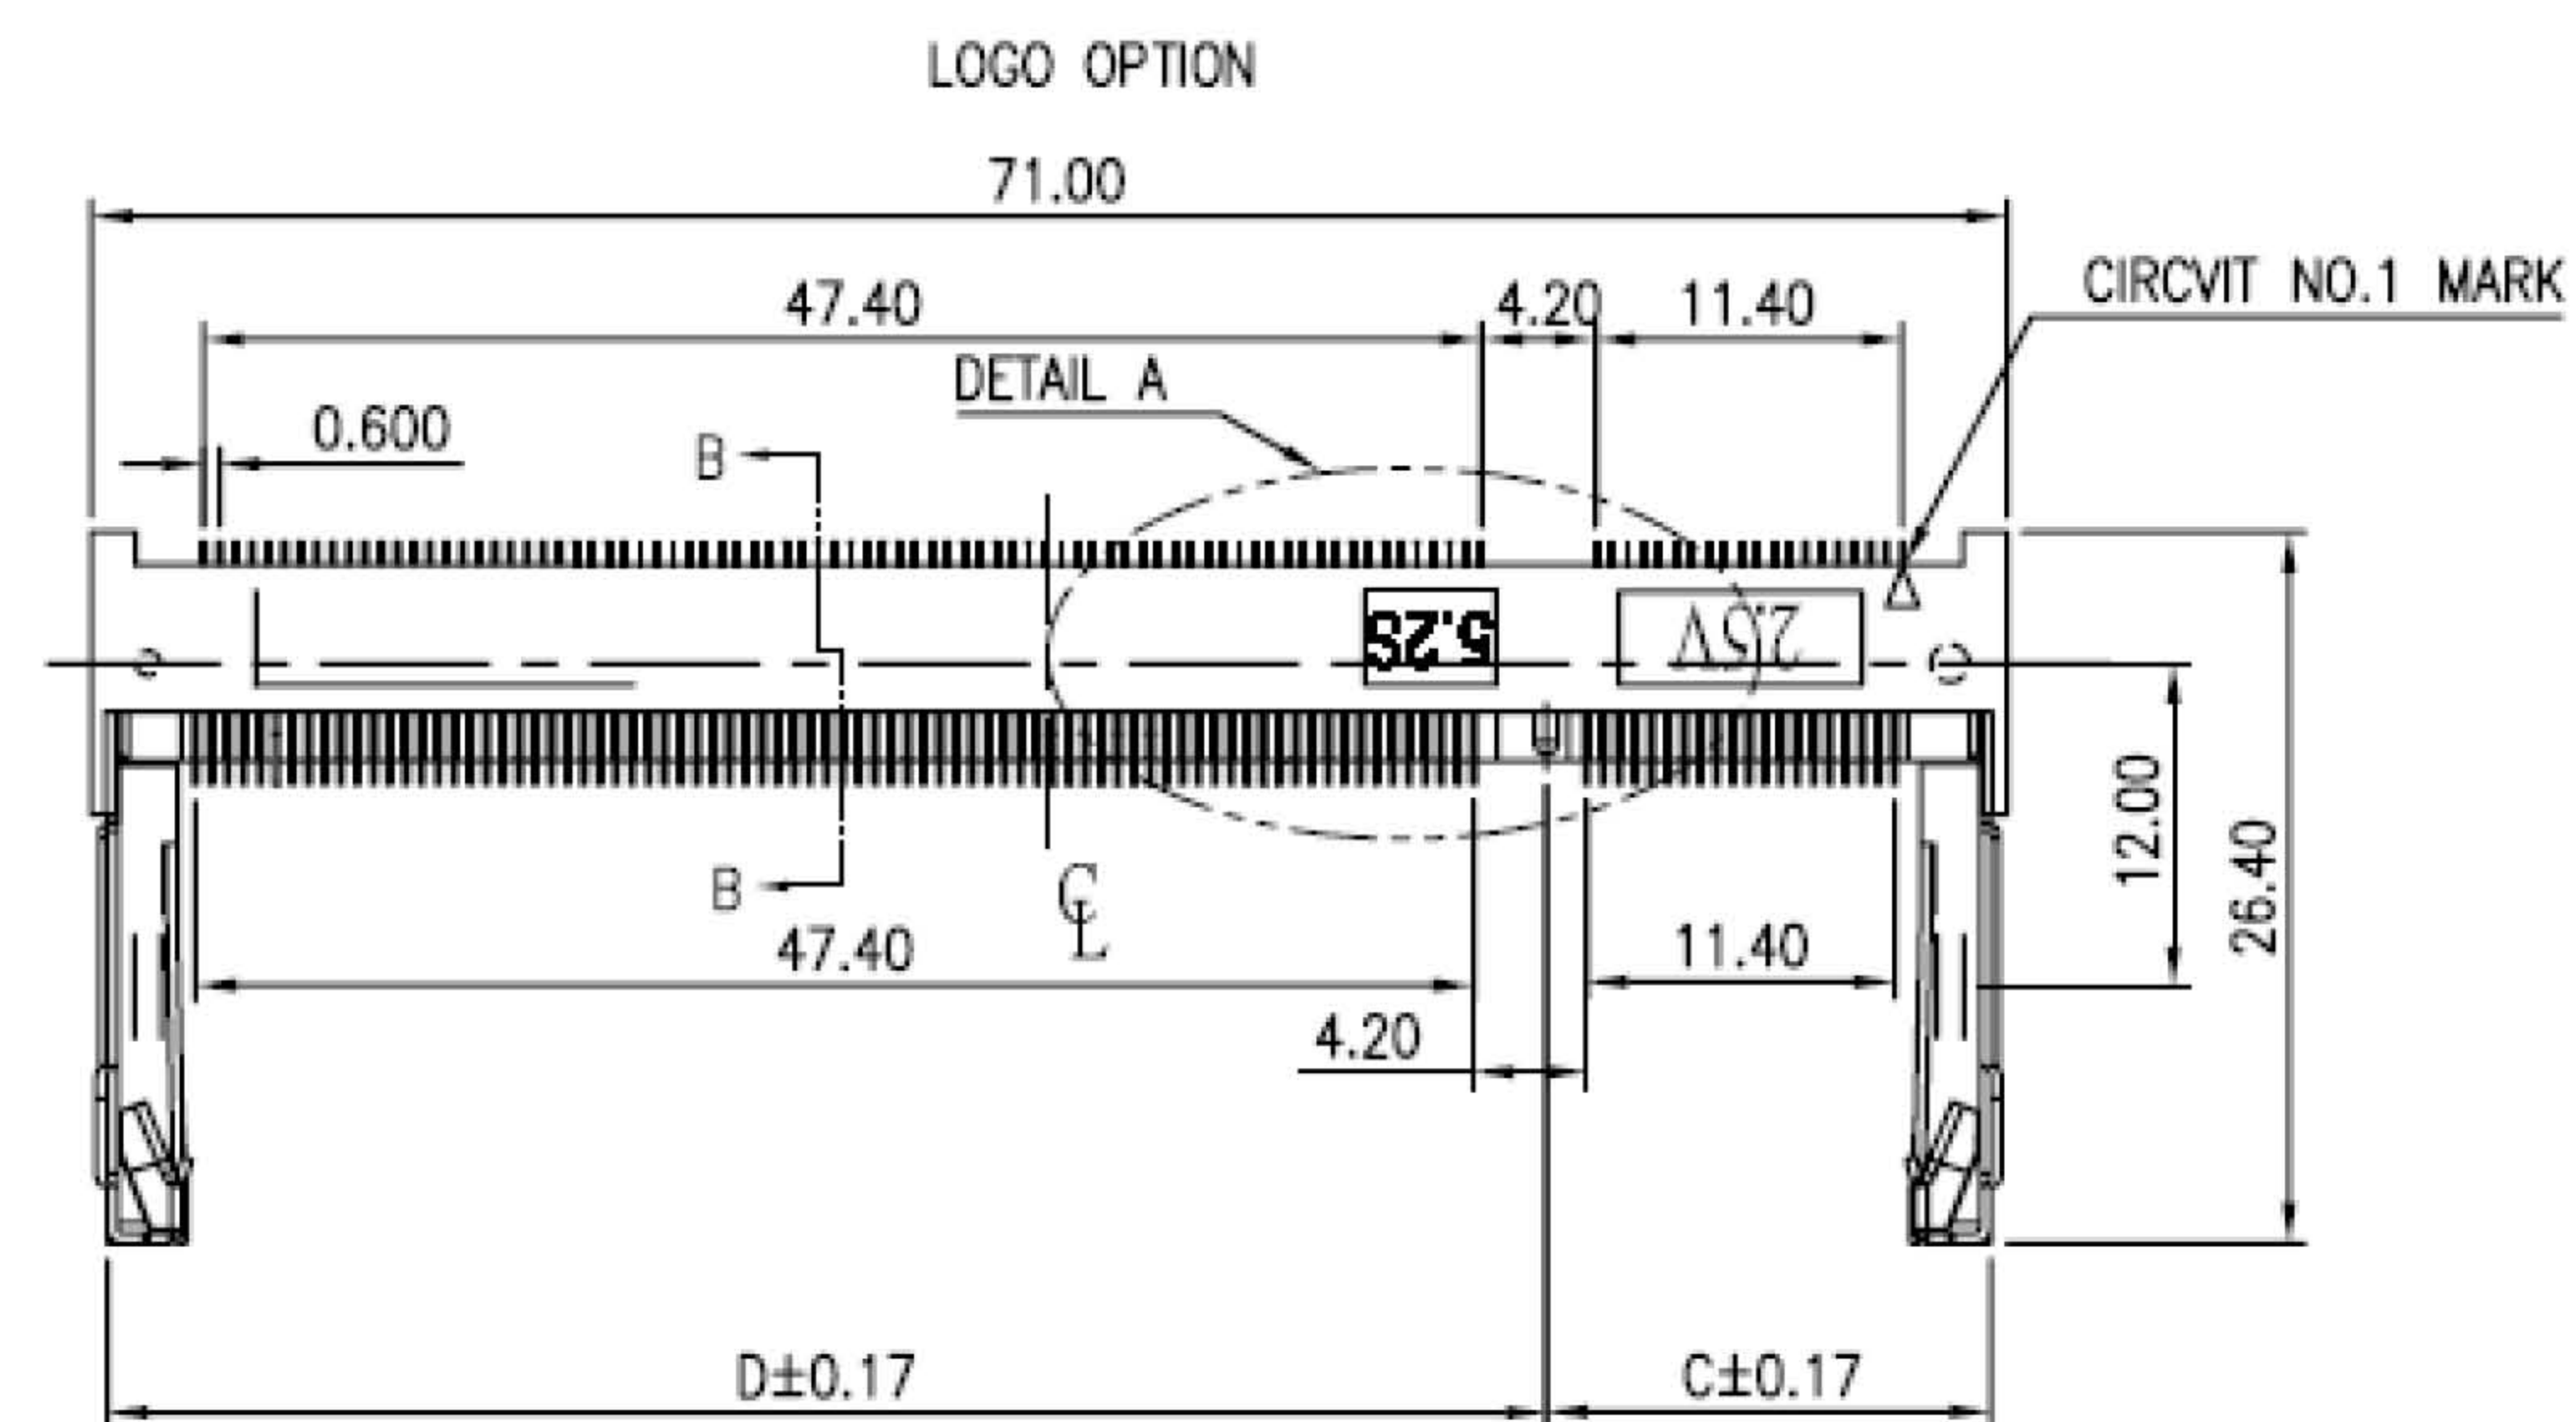

POWER SUPPLY 2.5V

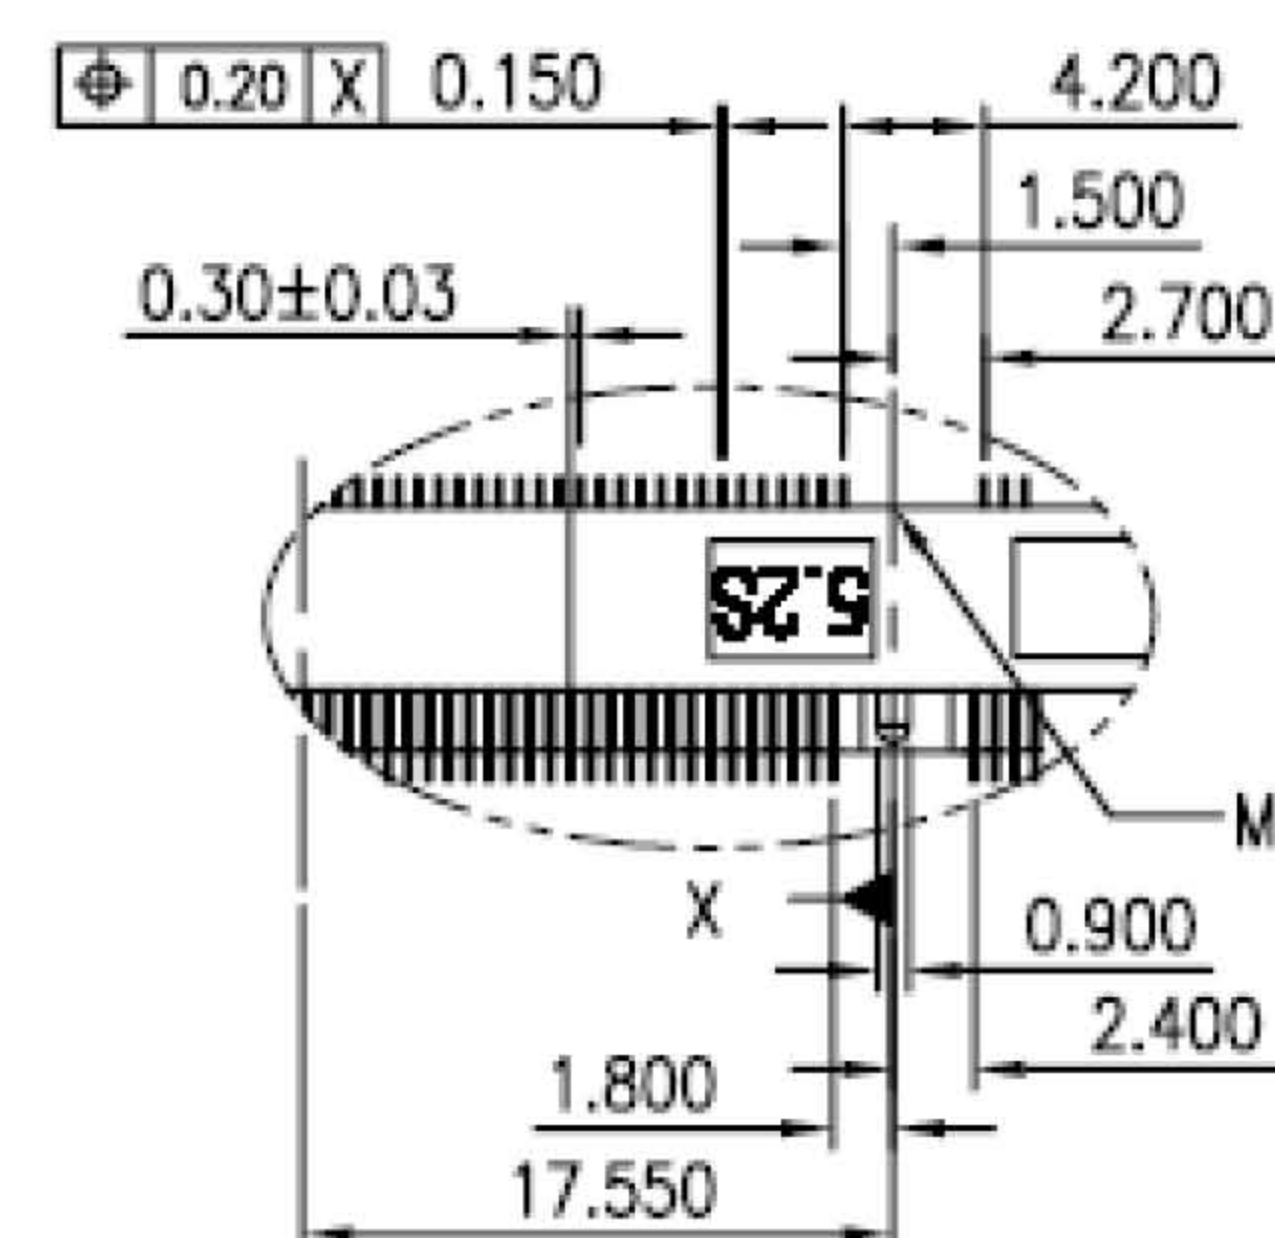

POWER SUPPLY 1.8V

|      | C $\pm 0.17$ | D $\pm 0.17$ |
|------|--------------|--------------|
| 2.5V | 16.47        | 53.37        |

DETAIL A VOLTAGE OPTION

# NOTES:

## 1. MATERIAL:

1.1 HOUSING: LCP WITH 30% G.F. UL 94V-0


1.2 CONTACT: BRASS

1.3 LATCH: STAINLESS

## 2. FINISH:

2.1 CONTACT: GOLD PLATED ON CONTACT & SOLDERING  
END OVER 50 $\mu$ " MIN. NICKEL UNDER-PLATING.

2.2 LATCH: 60~100 $\mu$ " SN ONLY (MATTE) PLATING OVER  
50 $\mu$ " MIN. NICKEL UNDERPLATING

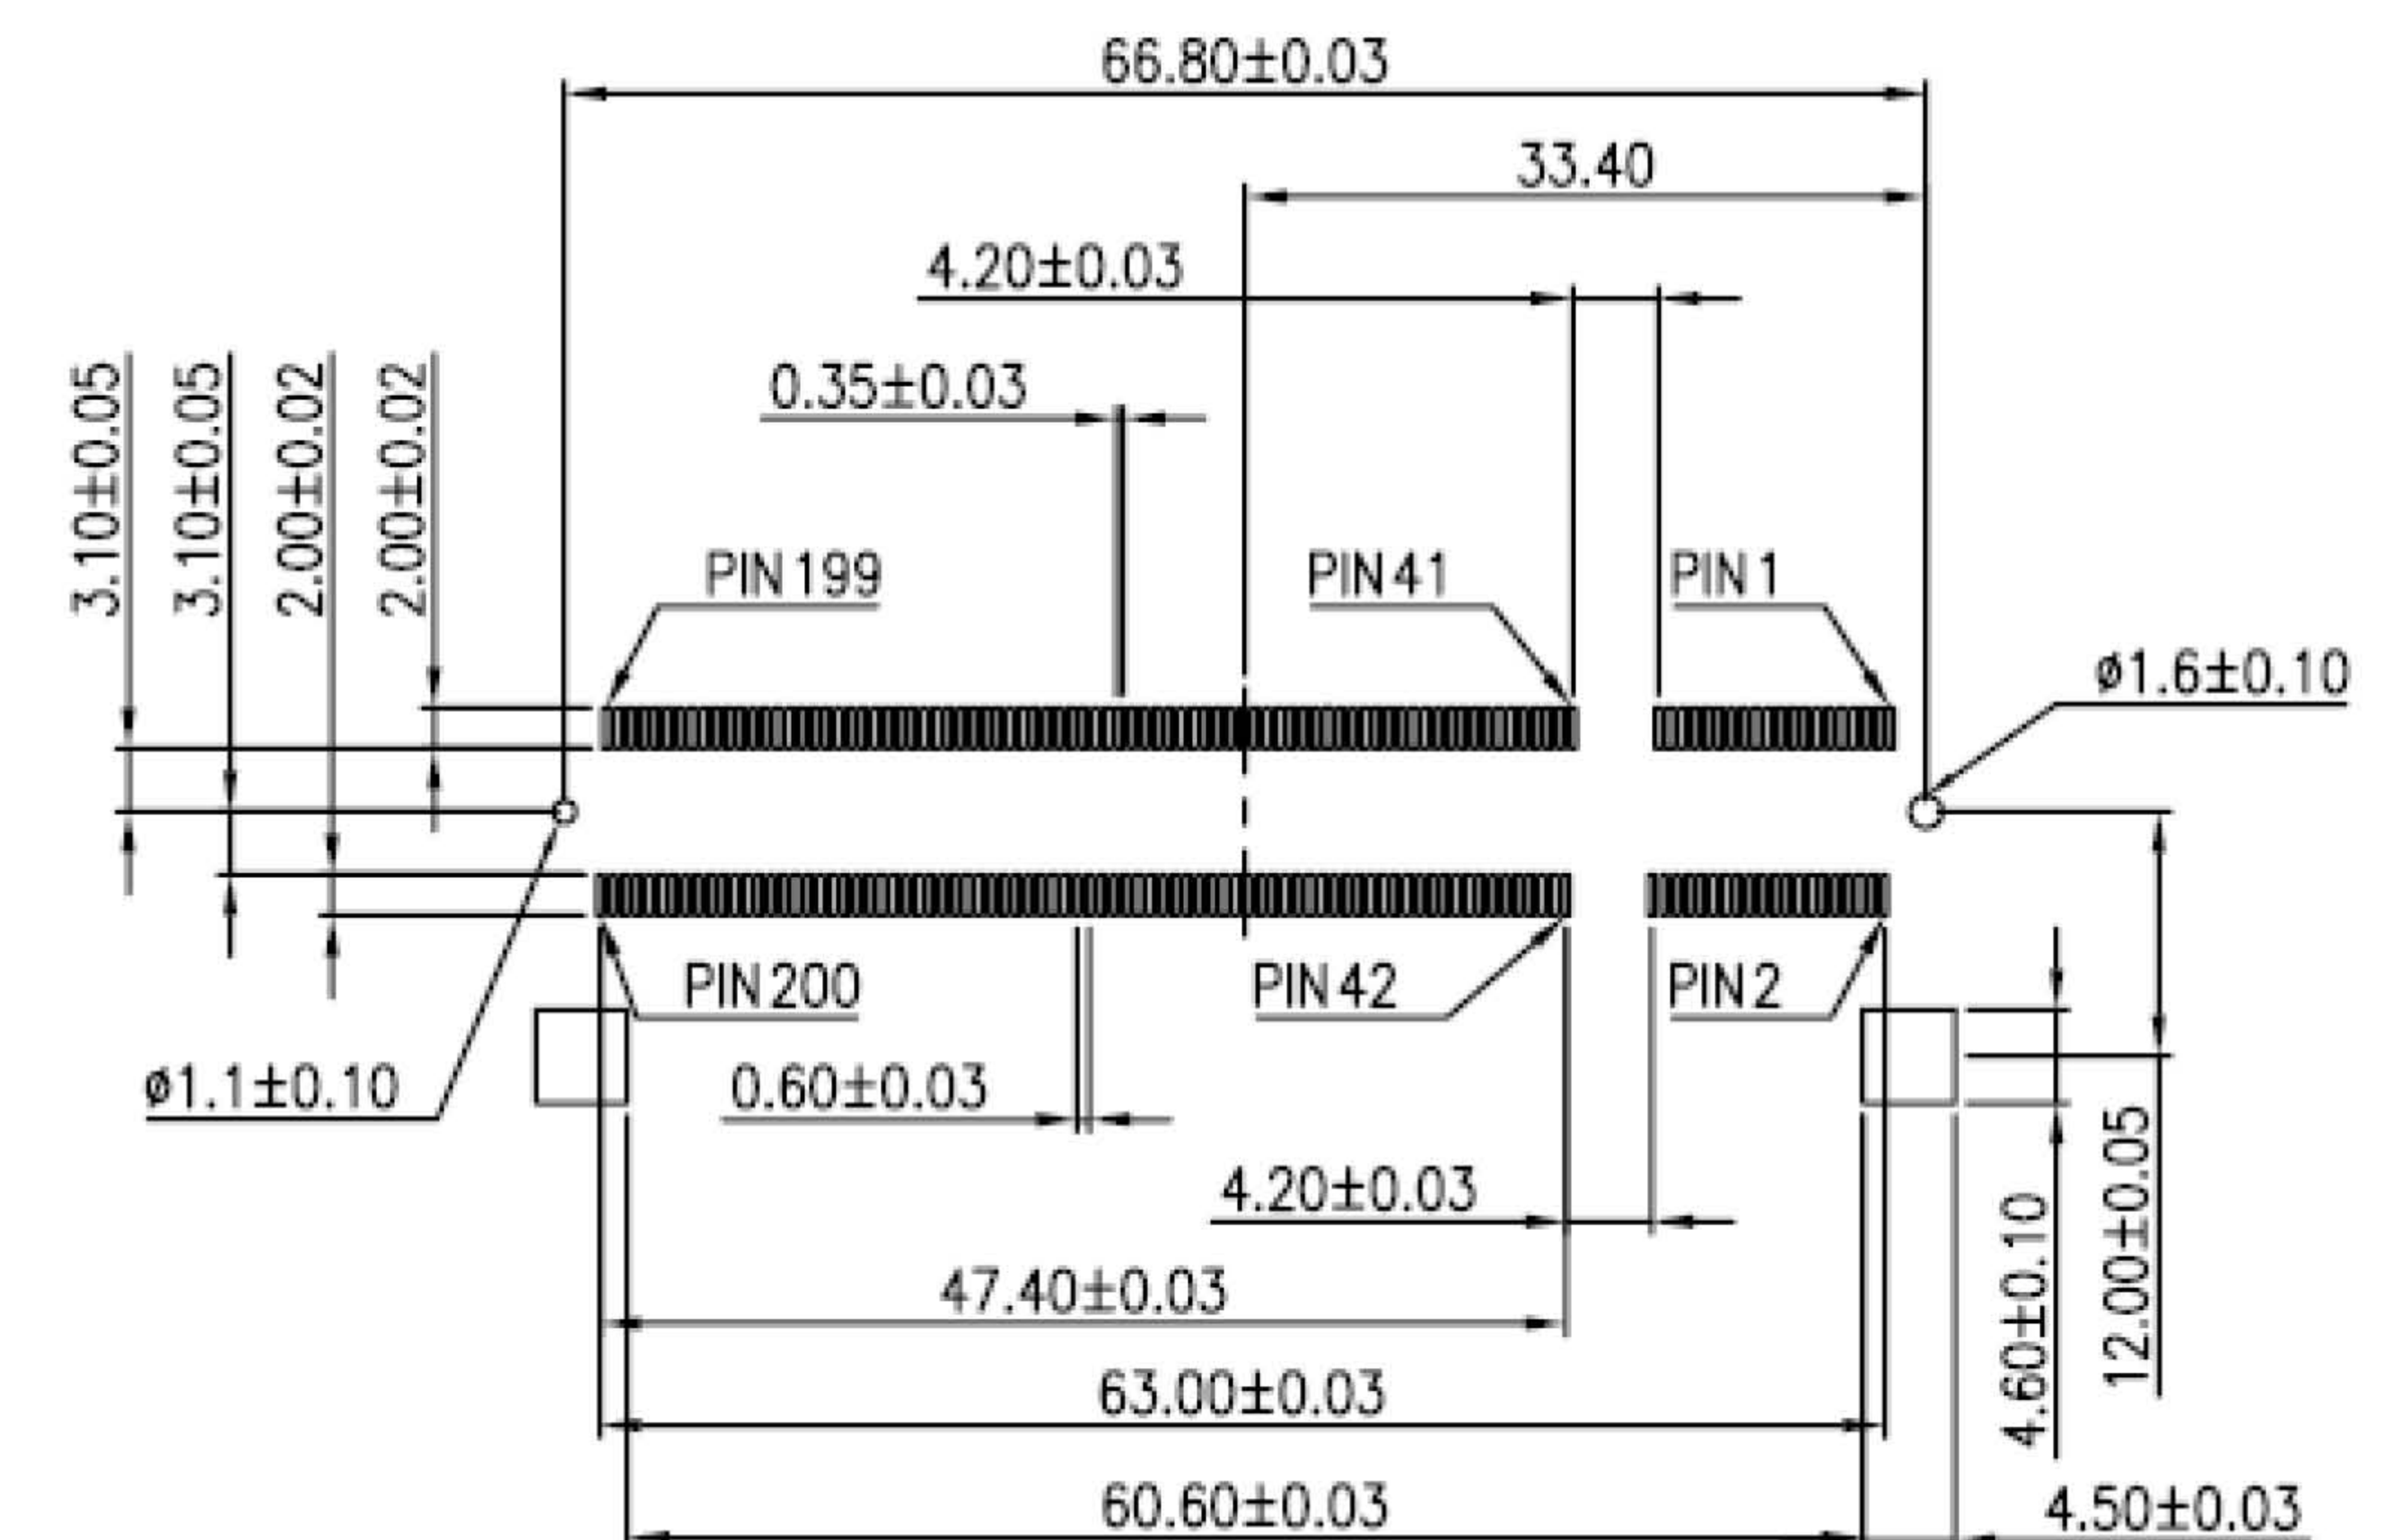

RECOMMENDED P.C.BOARD LAYOUT.

**SoniTexx<sup>®</sup>**

|      |       |      |            |                  |                     |
|------|-------|------|------------|------------------|---------------------|
| DWN  | HON   | DATE | 2007.07.16 | TOLERANCE:       | ANGLE $\pm 1^\circ$ |
|      |       |      |            | 0.0 $\pm 0.38$   | UNIT: mm            |
| CHKD | GARY  | DATE | 2007.07.16 | 0.00 $\pm 0.25$  | THIRD ANGLE         |
| APVD | JACKY | DATE | 2007.07.16 | 0.000 $\pm 0.15$ |                     |

TITLE

DDR SO DIMM SOCKET 0.6mm 200 PINS 5.2mm  
HEIGHT STANDARD TYPE 2.5V

PART NO

S200-S1211G1