










DVI Female Straight Dip Type 24Pin

Specifications

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:30mΩ Max.
Dielectric Voltage:250V AC for one minute
Operation Temperature:-55°C to +85°C

Material

Insulator:Polyester,UL 94V-0
◎ Standard:Nylon 66
Terminal:Copper Alloy
Plated:Selective Plated

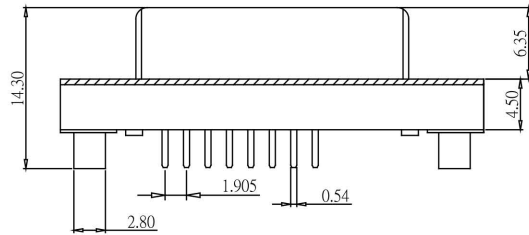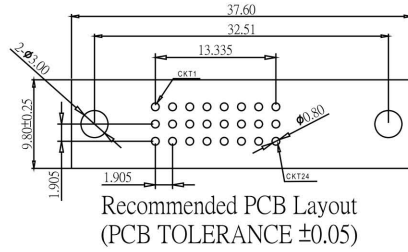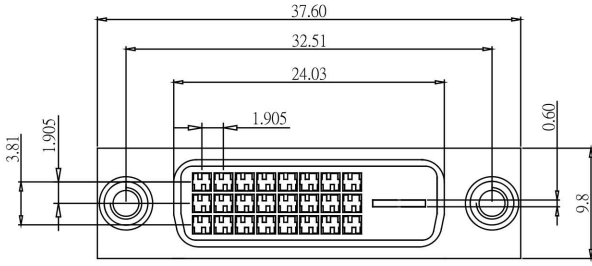










DVI Female Straight Dip Type 29Pin

Specifications

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:30mΩ Max.
Dielectric Voltage:250V AC for one minute
Operation Temperature:-55°C to +85°C

Material

Insulator:Polyester,UL 94V-0
◎ Standard:Nylon 66
Terminal:Copper Alloy
Plated:Selective Plated

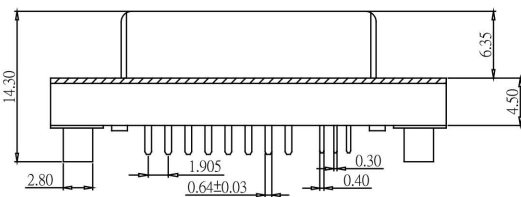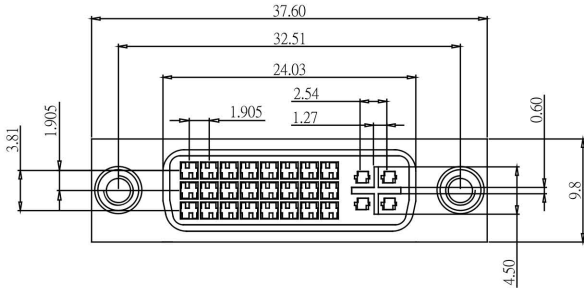

ORDER INFORMATION

V	I	D	-	F	X	X	X	W	N	X	-	L
No. of Contacts (24,29)					◎S:Selective SH:Selective 3u" SA:Selective 5u" SF:Selective 15u" SD:Selective 30u"			W:White Insulator N:Nickel Shell	◎B:Rivet C:Rivet & Jack Screw Attached D:Rivet & Jack Screw Insert			L:RoHS + Nylon 66