









# DVI Female Solder Type 24Pin

### Specifications

Current Rate:1 AMP  
Insulation Resistance:1000MΩ Min.  
Contact Resistance:30mΩ Max.  
Dielectric Voltage:250V AC for one minute  
Operation Temperature:-55°C to +85°C

### Material

Insulator:Polyester,UL 94V-0  
© Standard:Nylon 66  
Terminal:Copper Alloy  
Plated:Selective Plated

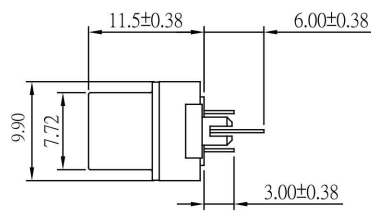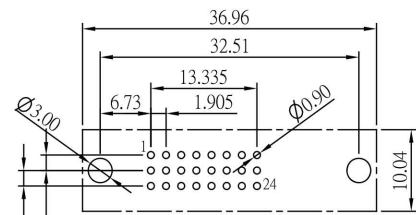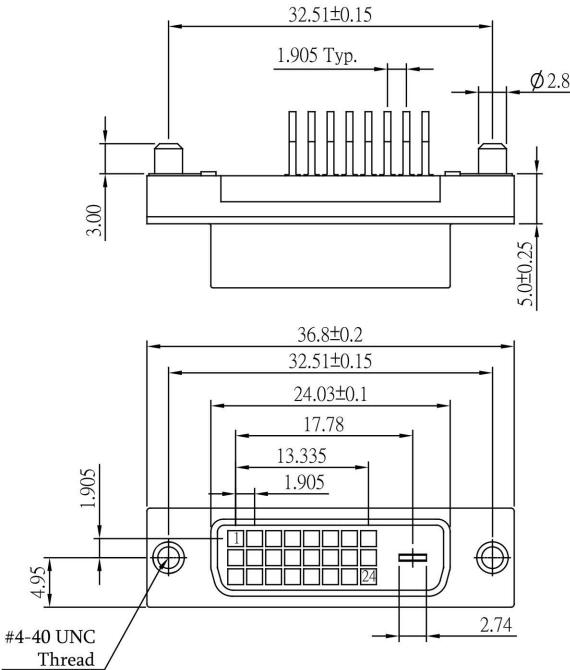







# DVI Female Solder Type 29Pin

### Specifications

Current Rate:1 AMP  
Insulation Resistance:1000MΩ Min.  
Contact Resistance:30mΩ Max.  
Dielectric Voltage:250V AC for one minute  
Operation Temperature:-55°C to +85°C

### Material

Insulator:Polyester,UL 94V-0  
© Standard:Nylon 66  
Terminal:Copper Alloy  
Plated:Selective Plated

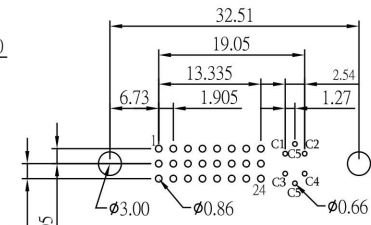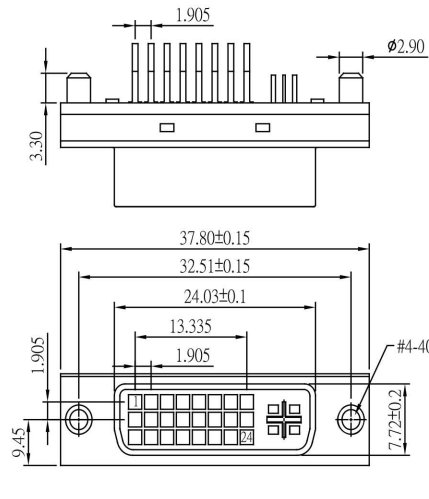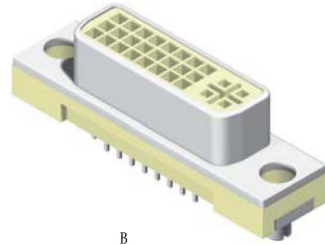

# ORDER INFORMATION

|                         |   |   |                                                                                                |   |   |                                     |   |   |                                                                          |   |   |                   |
|-------------------------|---|---|------------------------------------------------------------------------------------------------|---|---|-------------------------------------|---|---|--------------------------------------------------------------------------|---|---|-------------------|
| V                       | I | S | -                                                                                              | F | X | X                                   | X | W | N                                                                        | X | - | L                 |
| No. of Contacts (24,29) |   |   | ©S:Selective<br>SH:Selective 3u*<br>SA:Selective 5u*<br>SF:Selective 15u*<br>SD:Selective 30u* |   |   | W:White Insulator<br>N:Nickel Shell |   |   | ©B:Rivet<br>C:Rivet & Jack Screw Attached<br>D:Rivet & Jack Screw Insert |   |   | L:RoHS + Nylon 66 |