


DVI Male Solder Type 24Pin

Specifications

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:30mΩ Max.
Dielectric Voltage:250V AC for one minute
Operation Temperature:-55°C to +85°C

Material

Insulator:Polyester,UL 94V-0
©Standard:PBT
Terminal:Copper Alloy
Plated:Selective Plated

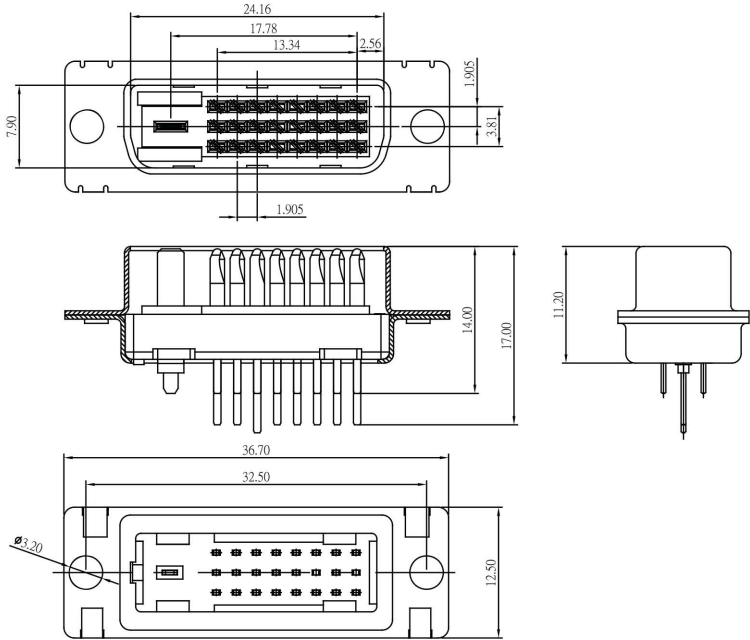


DVI Male Solder Type 29Pin

Specifications

Current Rate:1 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:30mΩ Max.
Dielectric Voltage:250V AC for one minute
Operation Temperature:-55°C to +85°C

Material

Insulator:Polyester,UL 94V-0
©Standard:PBT
Terminal:Copper Alloy
Plated:Selective Plated

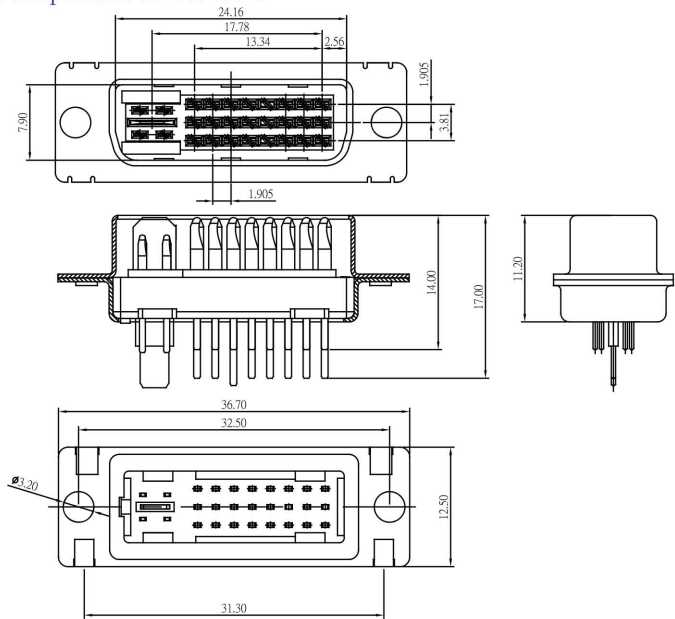

ORDER INFORMATION

V	I	S	-	M	X	X	X	B	N	A	-	L	
No. of Contacts (24,29)				©S:Selective SA:Selective 5u" SF:Selective 15u" SD:Selective 30u"		B:Black Insulator		N:Nickel Shell		©A:Non Accessories		L:RoHS + PBT	