
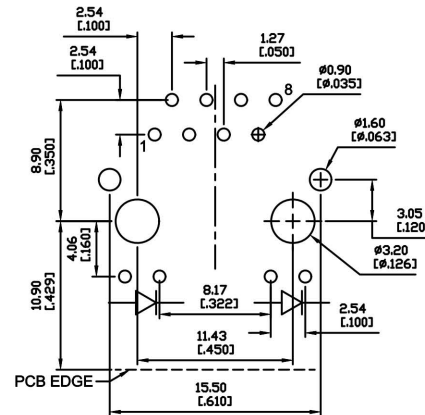
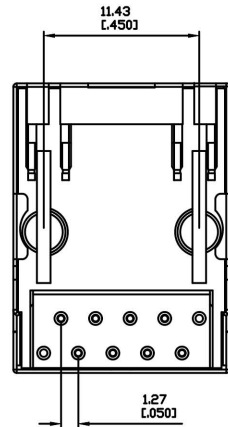
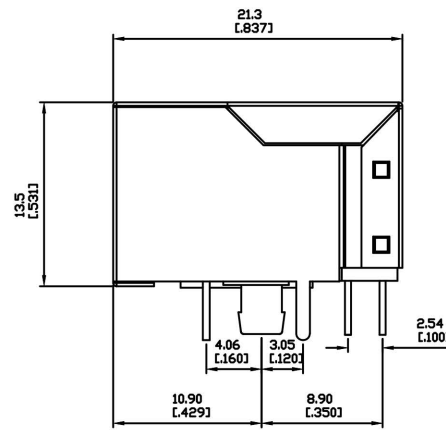


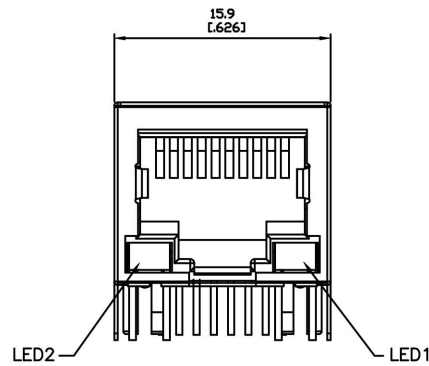

SUGGESTED PCB LAYOUT
TOP VIEW

Electrical Characteristics :

Insulation Resistance : 500MΩ Min.

Contact Resistance : 30mΩ Max.

Withstand Voltage : 1000 VAC 1 minute.

Current Rating : 1.5A

Material:

Housing : Thermoplastic UL94V-0


Contact : Full Gold Plating

Spring Wire : Dia 0.45mm Phosphor Bronze

Optional Gold Plating Over Nickel

Shielded : Brass, Nickel Plating

PART NO : 8 1 0 8 - B * 1 *

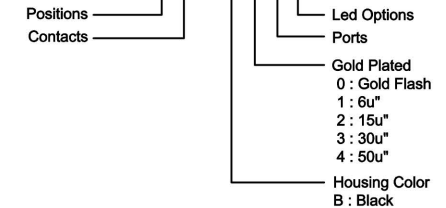

LED Color Options Table

LED Color Options		LED DASH OPTION
LED 2 (Left)	LED 1 (Right)	
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9
Green	Orange	A
Orange	Green	B
Green	Red	C
Red	Green	D

SHIELDED RJ45
WITH LED PCB JACK

SoniTexx®