
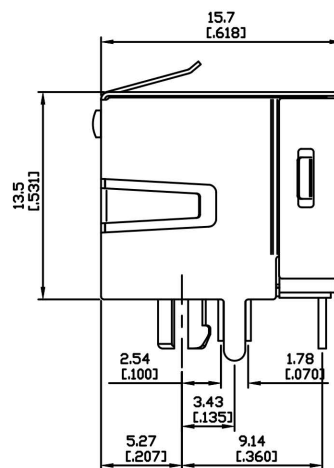
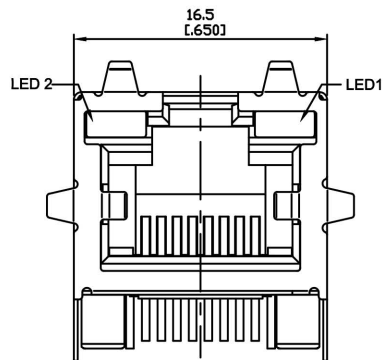




Electrical Characteristics :
Insulation Resistance : 500MΩ Min.
Contact Resistance : 50mΩ Max.
Withstand Voltage : 1000 VAC 1 minute.
Current Rating : 1.5A

Material:

Housing: Thermoplastic UL 94V-0

Contact : Selective Gold Plating

Terminal: 0.35mm Thickness Phosphor Bronze
Plated With Gold And Tin In Solder Area.

Shielded: Brass ,Nickel Plating

PART NO : 8 1 8 8 D S - B * 1 * - 0

Positions

Contacts

Panel Ground

S : 3 Side With Panel Ground

Housing Color

B : Black

Led Options

Ports

Gold Plated



0 : Gold Flash

1 : 6u"


2 : 15u"

3 : 30u"

4 : 50u"

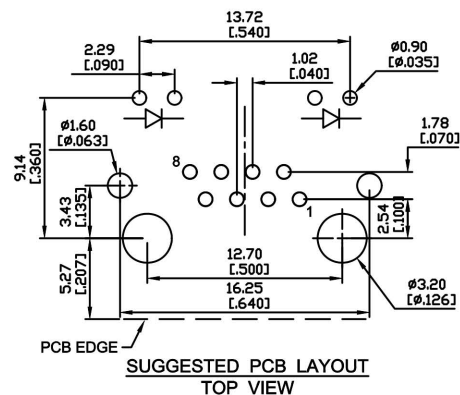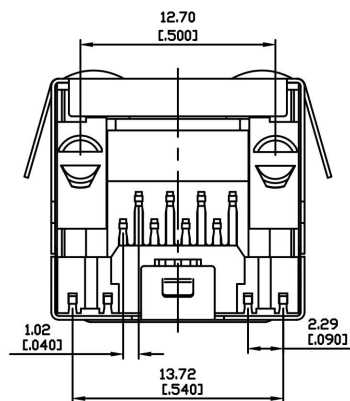

TYPICAL FOR



— TYPICAL FOR
SINGLE COLOR

LED SCHEMATIC

LED Color Options Table

LED Color Options		LED DASH OPTION
LED 2 (Left)	LED 1 (Right)	
No LED	No LED	0
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9
No LED	Green/Yellow	Z
Green	Orange	A
Orange	Green	B
Green	Red	C
Red	Green	D

④

SHIELDED RJ45
WITH LED PCB JACK

SoniTexx®