

Electrical Characteristics :

Insulation Resistance : 500MΩ Min.

Contact Resistance : 50mΩ Max.

Withstand Voltage : 1000 VAC 1 minute.

Current Rating : 1.5A


Material:

Housing: Thermoplastic UL 94V-0

Contact : Selective Gold Plating

Terminal: 0.35mm Thickness Phosphor Bronze
Plated With Gold And Tin In Solder Area.

PART NO : 8 1 8 8 D N - B * 1 * - 0

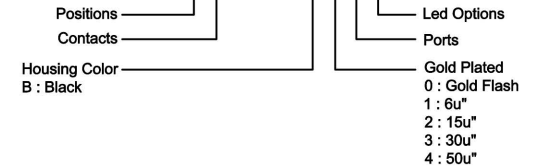

LED Color Options Table

LED Color Options		LED DASH OPTION
LED 2 (Left)	LED 1 (Right)	
No LED	No LED	0
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9
No LED	Green/Yellow	Z
Green	Orange	A
Orange	Green	B
Green	Red	C
Red	Green	D
Green	No LED	H

NON-SHIELDED RJ45
WITH LED PCB JACK

SoniTexx®