

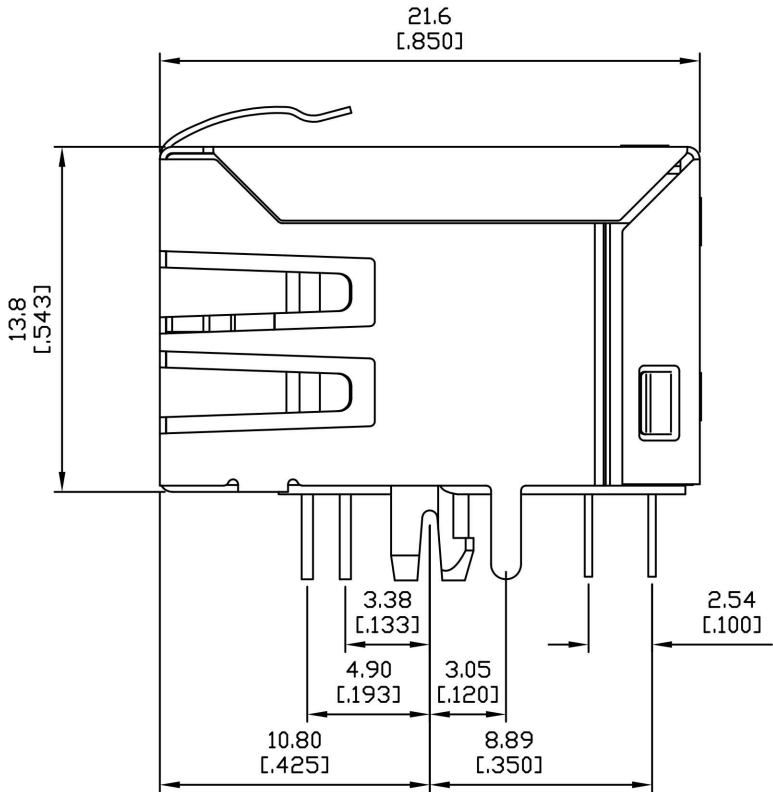
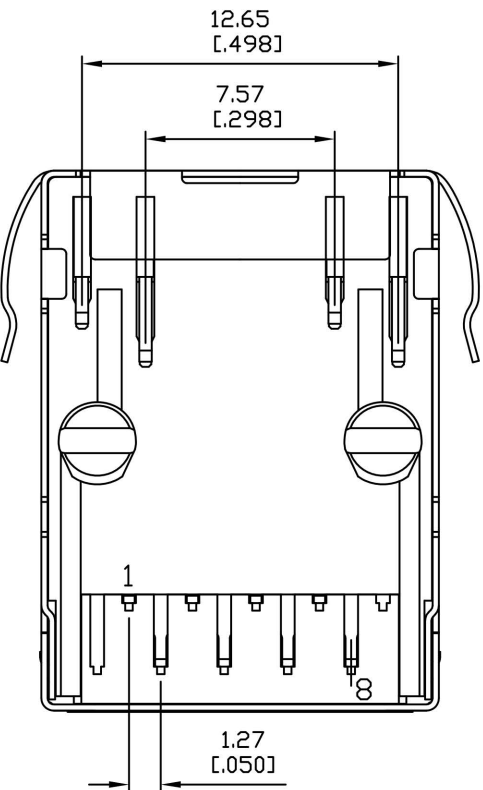


1. MECHANICAL DIMENSIONS:

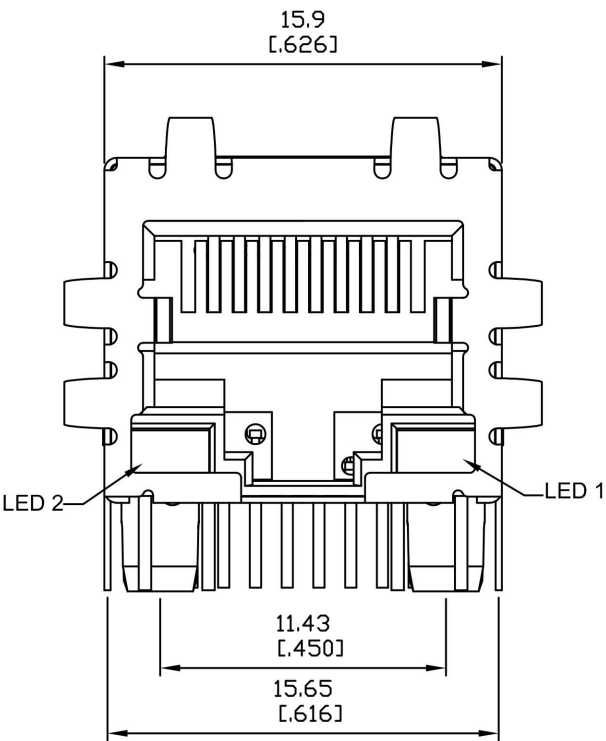

TOLERANCE(公差):
0.000 mm ± 0.075 mm
0.00 mm ± 0.15 mm
0.0 mm ± 0.25 mm

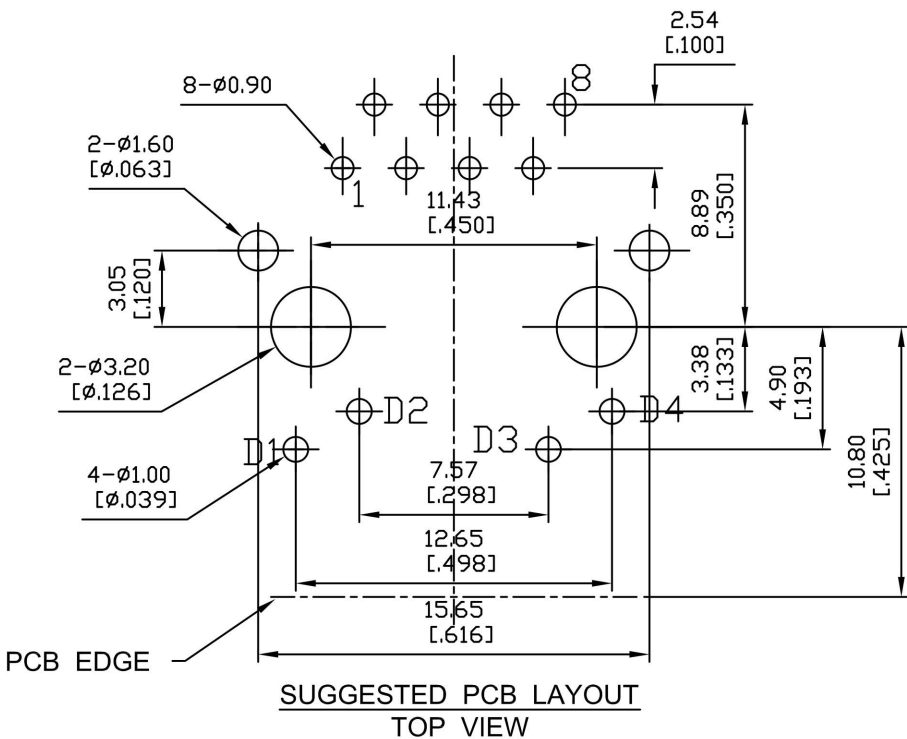

- Material:
- 1.Housing: Thermoplastic UL 94V-0
 - 2.Contact : Selective Gold Plating
 - 3.Terminal: 0.35mm Thickness Phosphor Bronze Plated With Gold And Tin In Solder Area.
 - 4.Shielded: Brass ,Nickel Plating

PART NO : 7 5 8 8 A S - B * * * - 2 0 0 0 - D x x - B * B

Positions
Contacts
Extender Series
Penel Ground
Non : Non Panel Ground
U : Top With Panel Ground
D : 2 Sides With Panel Ground
S : 3 Sides With Panel Ground
Housing Color
B : Black
Gold Plated
0 : Gold Flash
1 : 6u"
2 : 15u"
3 : 30u"
4 : 50u"
Ports
Led Options
Dimensions On Side Shield Tab
2 : D = 3.05
Rear Shield Tab
Protocol Type
D: 10/100 Mbps,4 core
Extender Color
Material
B : PBT
Circuit Type
Led Polarity

LED Color Options Table		
LED Color Options		LED OPTION
LED 2 (Left)	LED 1 (Right)	
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9

LED Polarity Table (Applicable only for single-colored LED)		
Position Number	LED 2 (Left)	LED 1 (Right)
0	D1 ⁺ D2 ⁻	D3 ⁺ D4 ⁻
1	D1 ⁺ D2 ⁻	D3 ⁺ D4 ⁻
2	D1 ⁺ D2 ⁻	D3 ⁺ D4 ⁻
3	D1 ⁺ D2 ⁻	D3 ⁺ D4 ⁻

RJ45 Connector,Shielded, With Led
With Transformer, Side Entry PCB Jack



2. SCHEMATIC:
10/100 Mbps Transformer Schematics

