




PART 68,SUBPART F.

Diagram illustrating the pinout configuration for a 10-pin connector. The pins are numbered 6, 6, 2, 5, -, X, -, 8, P, 8, C, -, X, Y, -, L. The corresponding descriptions are:

- 1~8 PORTS (Red triangle icon)
- Number of position (8P)
- Number of contact (8C)
- Gold Plating (Circle icon)
- Y: Gray insulator
- L: RoHS + P.B.T

Legend: ◎: Standard Recommend

DIMENSION	NO. OF PORT							
	1	2	3	4	5	6	7	8
A	17.00	28.00	39.00	50.00	61.00	72.00	83.00	94.00
B	13.8	24.8	35.8	46.8	57.8	68.8	79.8	90.8
C	0	11.00	22.00	33.00	44.00	55.00	66.00	77.00

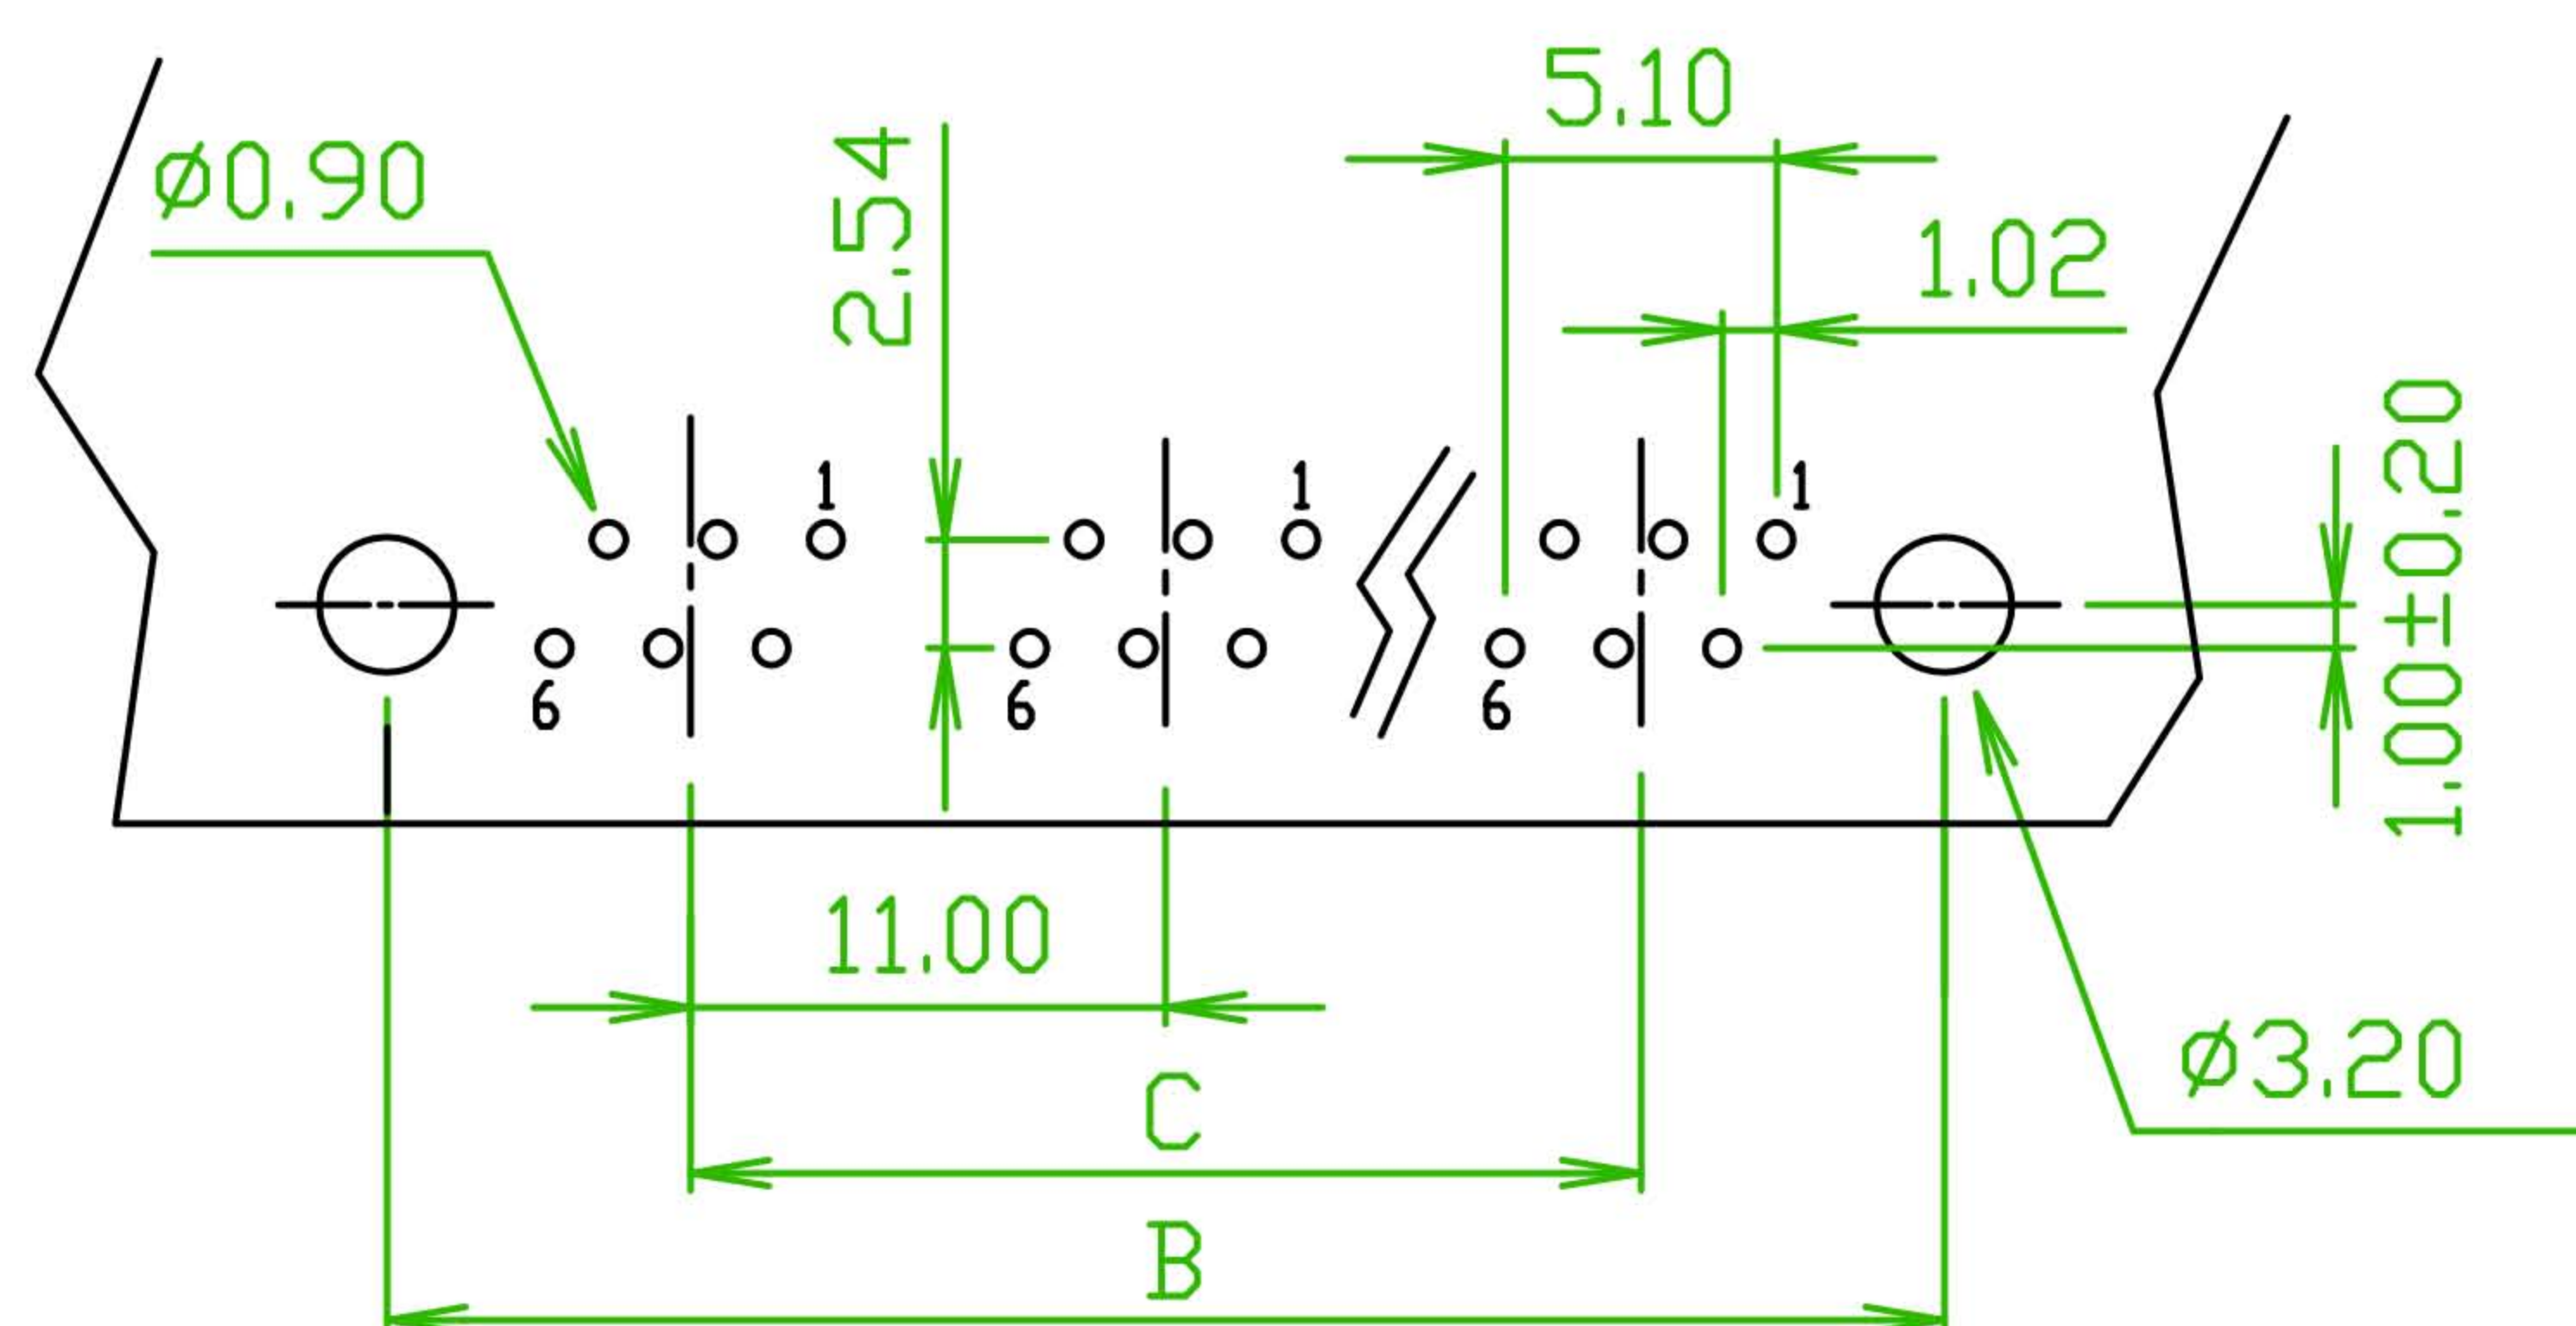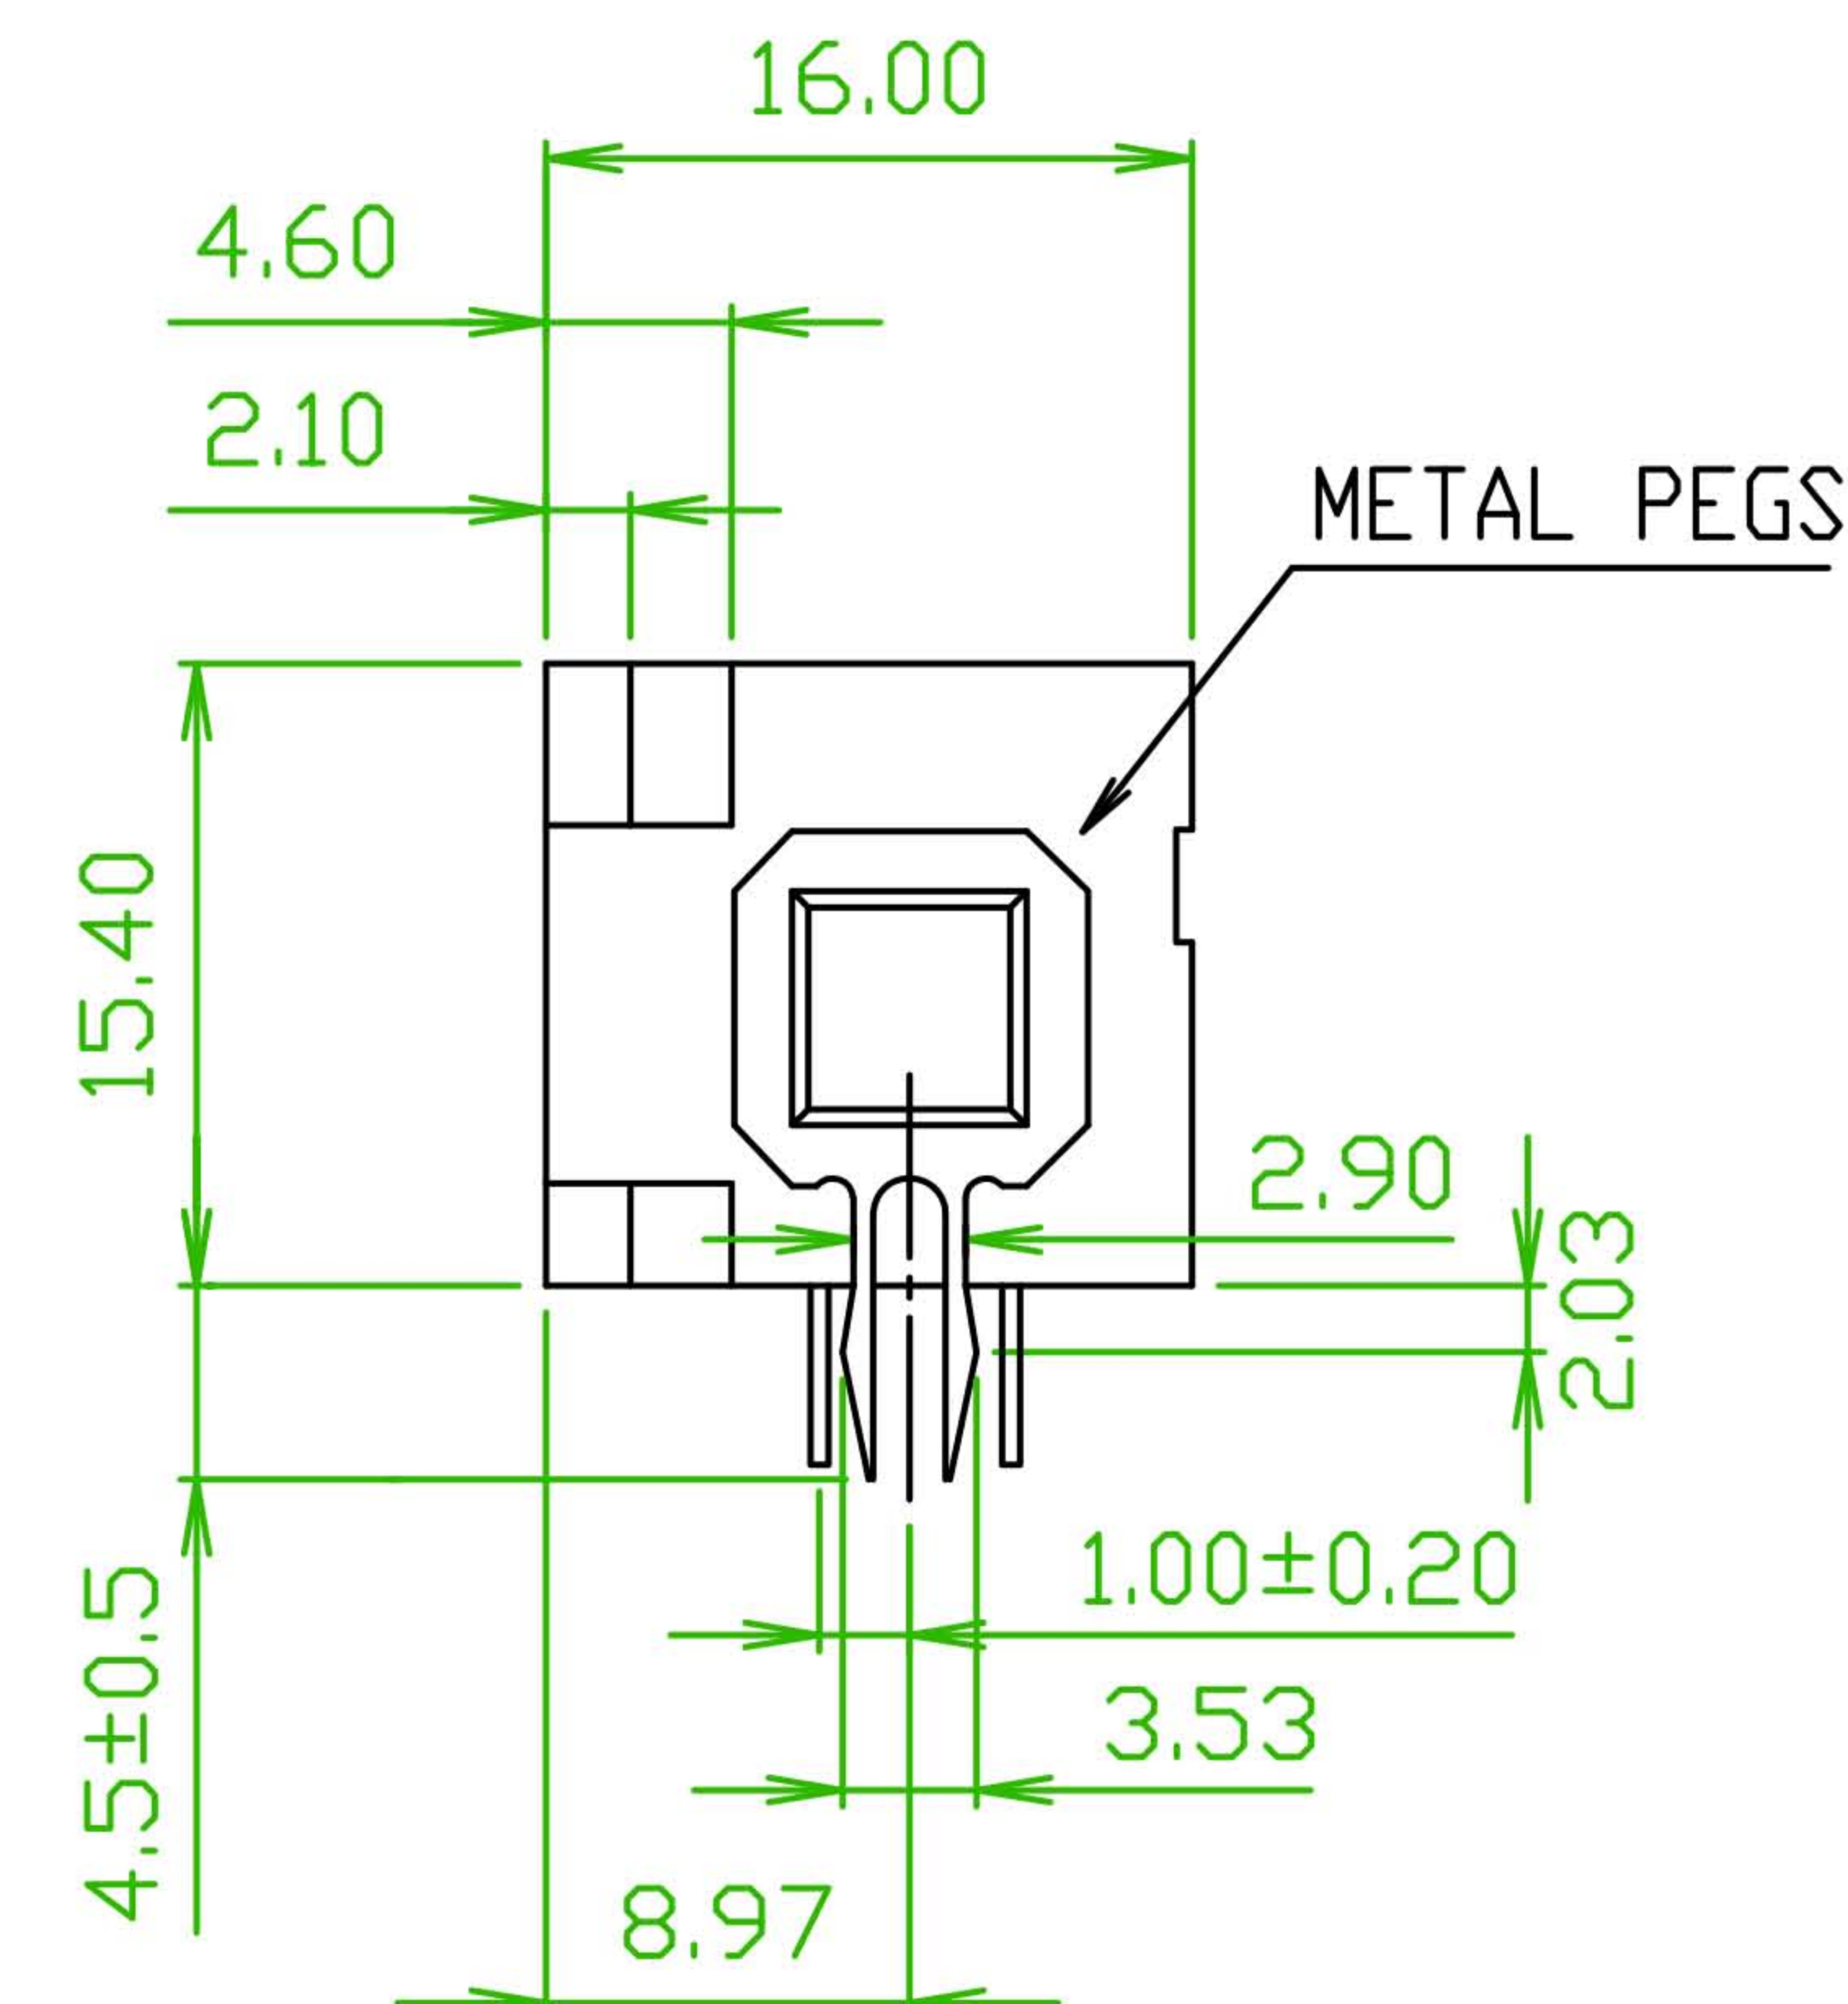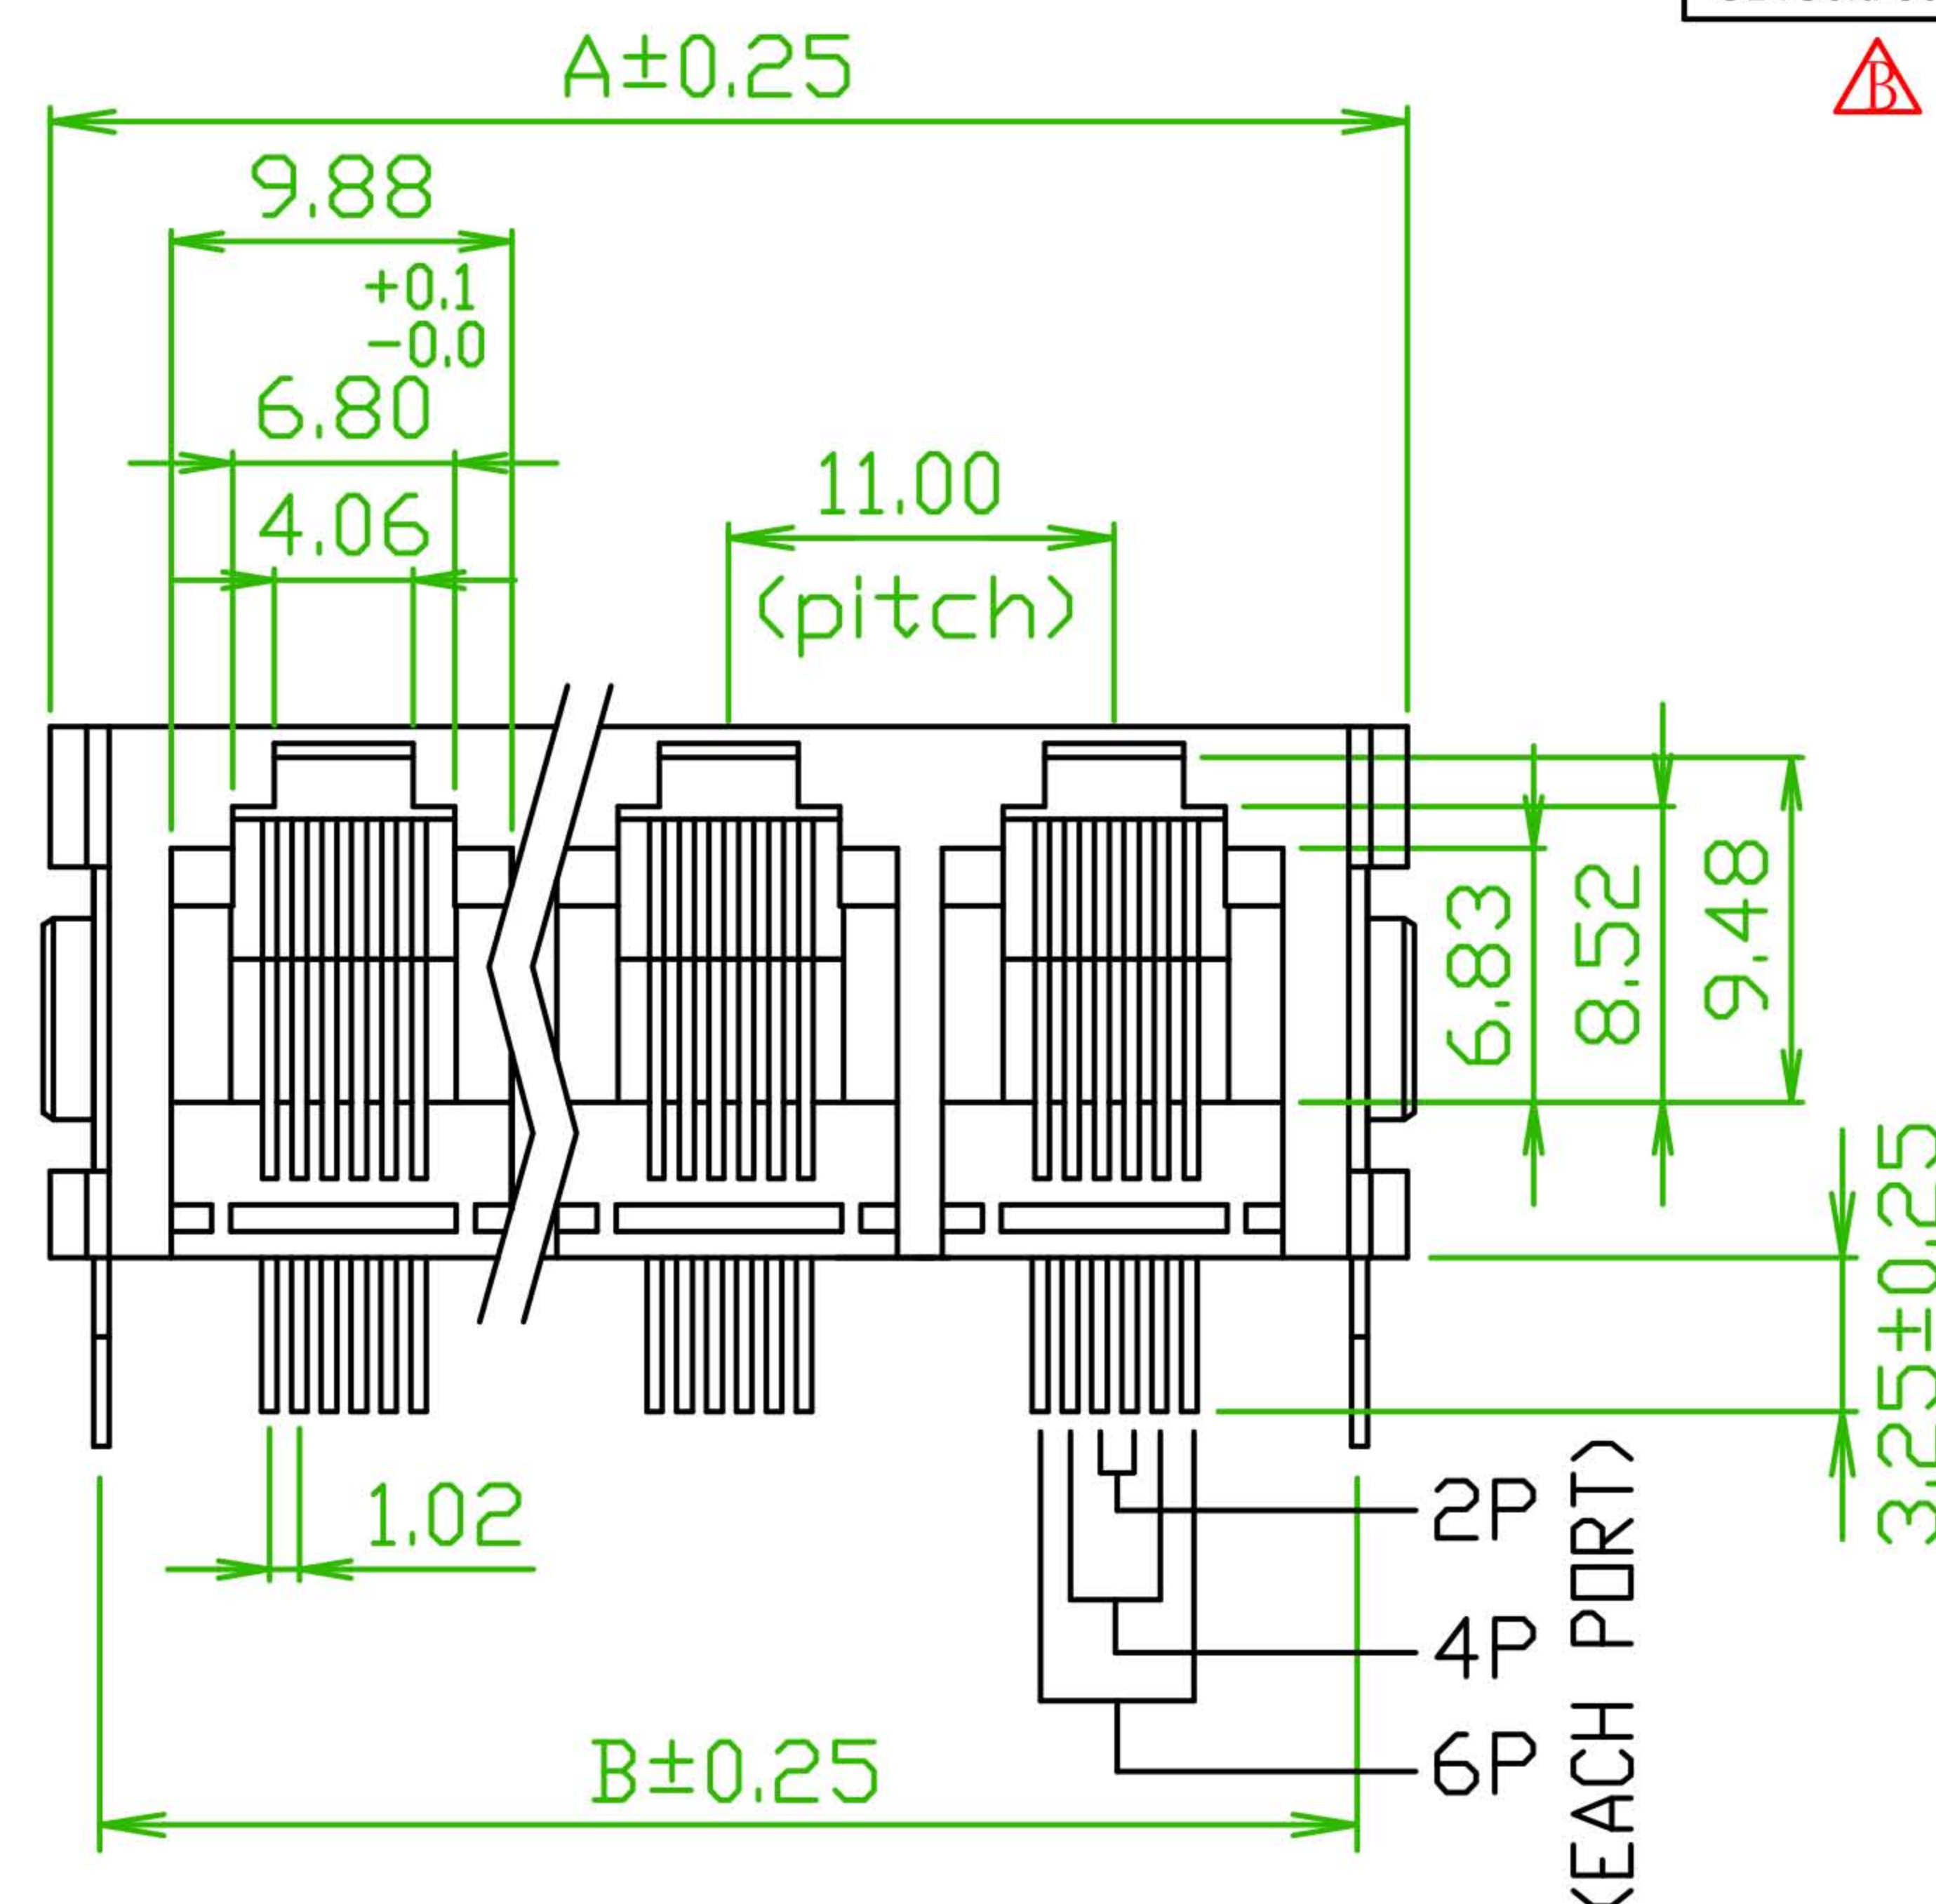

PC Board Layout



品 名 TITLE	8POSITION SIDE ENTRY PCB GANG JACK FROM 1 PORT THRU 8 PORTS				
品 號 PART NO.				日 期 DATE	03/17/2008
圖 號 DRAWING NO.		版 本 REV.	A	繪 圖 DRAWN	Volvo
客戶品號 CUSTOMER P/N		比 例 SCALE	FREE	核 對 CHECKED	Paul
公 差 TOLERANCE	.X ±0.25 .XX ±0.2	單 位 UNIT	mm	核 准 APPROVED	James