

Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 50mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:

Housing: Thermoplastic UL 94V-0


Contact : Selective Gold Plating

Terminal: 0.35mm Thickness Phosphor Bronze
 Plated With Gold And Tin In Solder Area.




PART NO : 8 1 8 8 D N - B * * * - 0

Positions ———— ↑ ↑ ↑ ↑
 Contacts ———— ↑ ↑
 Housing Color ———— ↑
 B : Black

LED Options
 Ports
 Gold Plated
 0 : Gold Flash
 1 : 6u"
 2 : 15u"
 3 : 30u"
 4 : 50u"

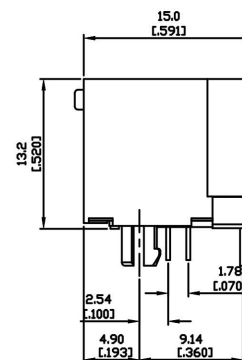

TOLERANCE(公差) :
 0.000 mm ± 0.075 mm
 0.00 mm ± 0.15 mm
 0.0 mm ± 0.25 mm

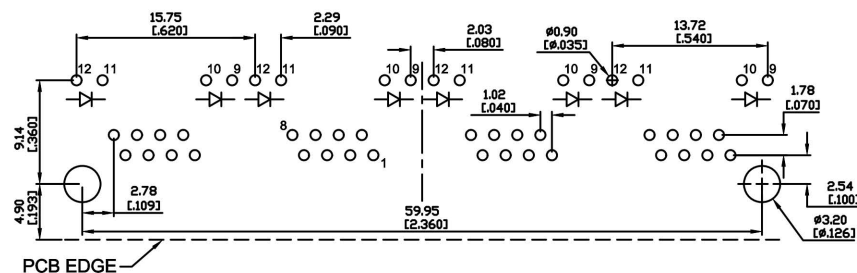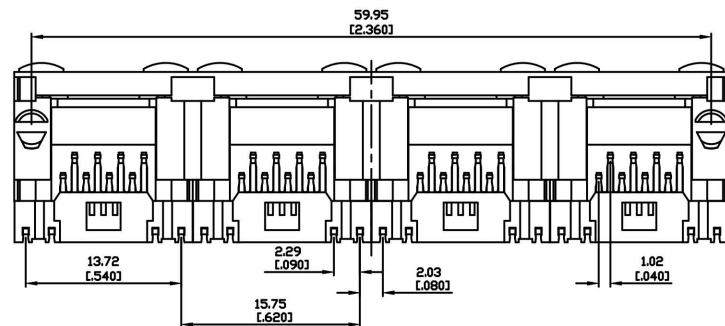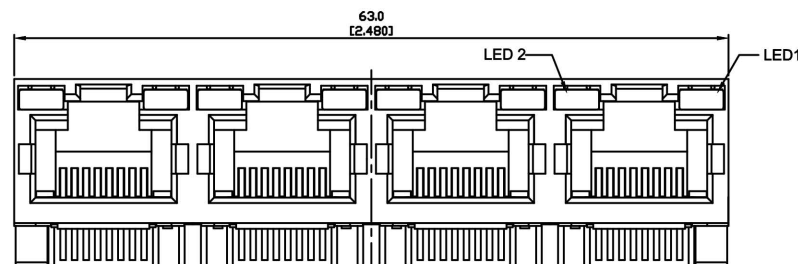

SUGGESTED PCB LAYOUT
 TOP VIEW

LED Color Options Table

LED Color Options		LED DASH OPTION
LED 2 (Left)	LED 1 (Right)	
No LED	No LED	0
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9
No LED	Green/Yellow	Z
Green	Orange	A
Orange	Green	B
Green	Red	C
Red	Green	D
Green	No LED	H

NON-SHIELDED RJ45
 WITH LED PCB JACK

SoniTexx®