

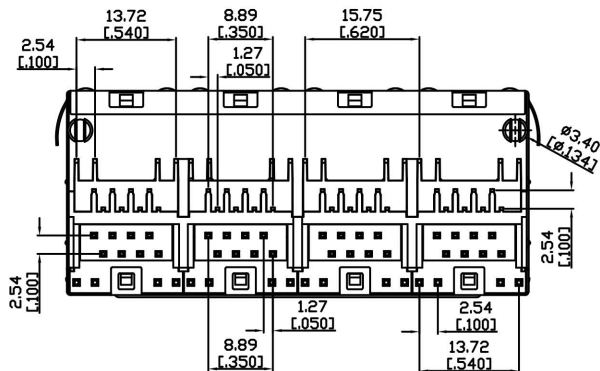
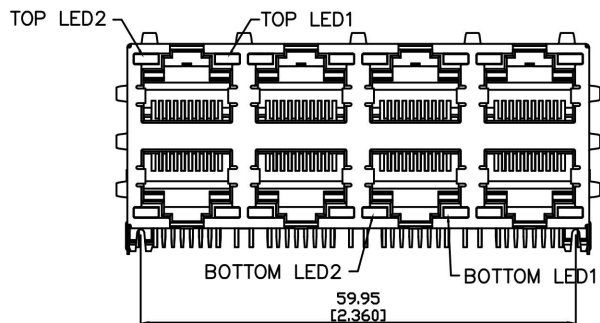
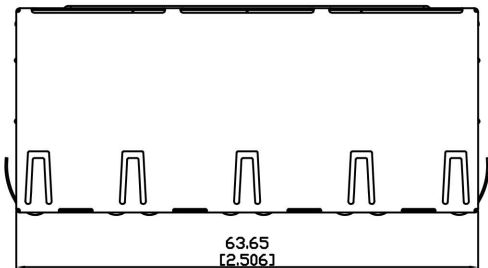


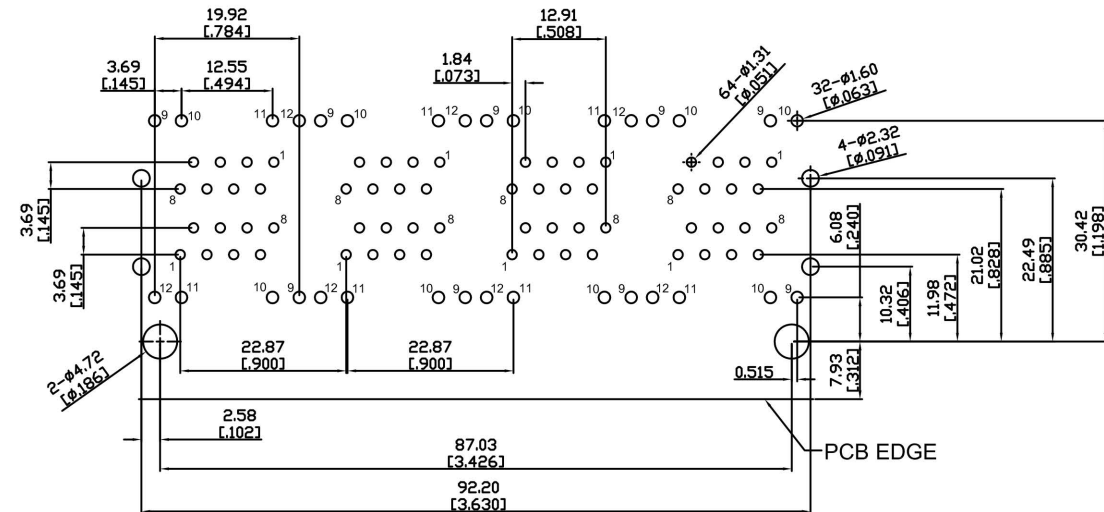

TOLERANCE(公差):  
 0.000 mm  $\pm$  0.075 mm  
 0.00 mm  $\pm$  0.15 mm  
 0.0 mm  $\pm$  0.25 mm

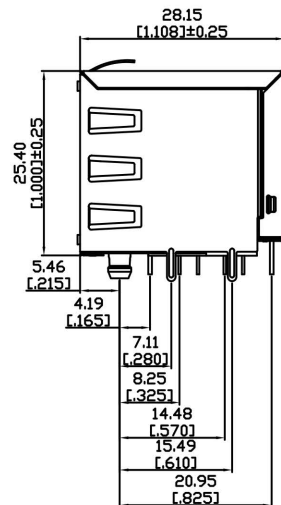

### RECOMMENDED PCB LAYOUT

TOP VIEW  
 (scale 3:2)

### LED Color Options Table

| LED Color Options |               | LED DASH OPTION |
|-------------------|---------------|-----------------|
| LED 2 (Left)      | LED 1 (Right) |                 |
| No LED            | No LED        | 0               |
| Yellow            | Green         | 1               |
| No LED            | Green         | 2               |
| Yellow            | No LED        | 3               |
| Green             | Yellow        | 4               |
| Green             | Green         | 5               |
| Yellow            | Yellow        | 6               |
| Orange/Green      | Orange/Green  | 7               |
| Yellow/Green      | Yellow/Green  | 8               |
| Orange/Green      | Yellow        | 9               |

PART NO : 8 1 8 8 S - B \* \* \* - D

Positions  
 Contacts  
 Housing Color  
 B : Black

LED OPTIONS  
 Ports  
 Gold Plated  
 0 : Gold FLash  
 1 : 6u"  
 2 : 15u"  
 3 : 30u"  
 4 : 50u"

### Electrical Characteristics :

Insulation Resistance : 500M $\Omega$ [ Min.  
 Contact Resistance : 50m $\Omega$ [ Max.  
 Withstand Voltage : 1000 VAC 1 minute.  
 Current Rating : 1.5A

### Material:

Housing: Thermoplastic UL 94V-0  
 Terminal: 0.35mm Thickness Phosphor Bronze  
 Plated With Gold In Contact Area And  
 Tin In Solder Area.  
 Shield : Brass, Nickel Plating.

DOUBLE ROW WITH-SHIELDED -LED  
 RJ45 SIDE ENTRY PCB JACK

**SoniTexx®**