

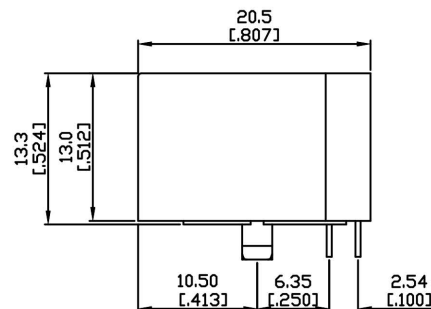
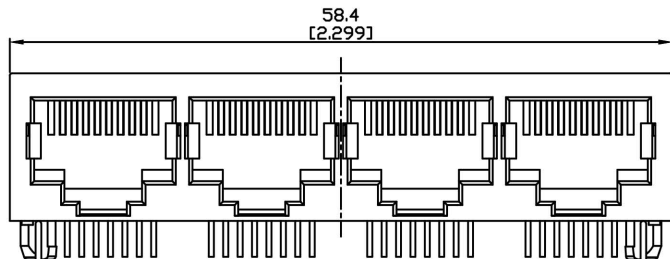


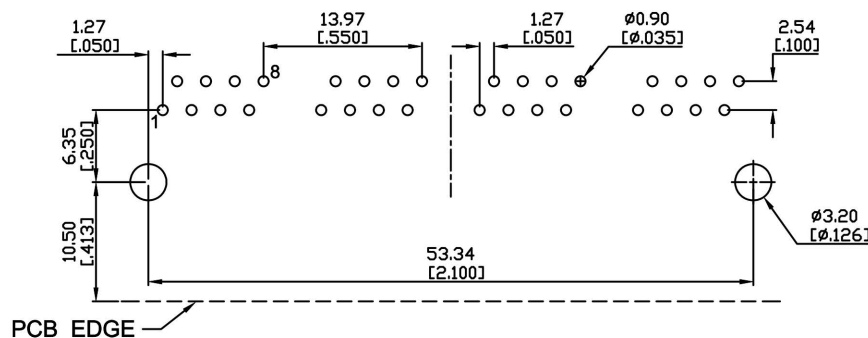

Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 30mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:

Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel

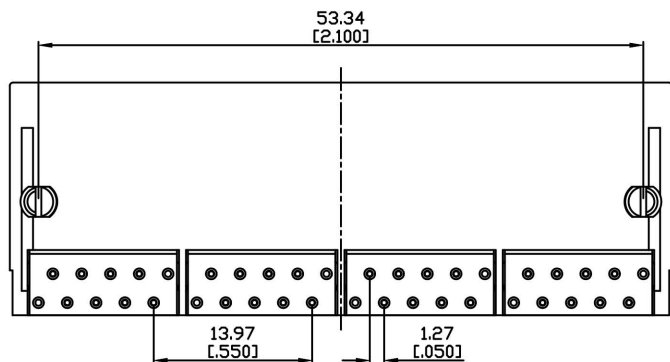

SUGGESTED PCB LAYOUT
TOP VIEW

PART NO : 8 2 0 8 - B * *

Positions ———> 8
 Contacts ———> 2
 Housing Color ———> B
 Ports ———> *
 Gold Plated ———> *
 0 : Gold Flash
 1 : 6u"
 2 : 15u"
 3 : 30u"
 4 : 50u"

TOLERANCE(公差) :
 0.000 mm ± 0.075 mm
 0.00 mm ± 0.15 mm
 0.0 mm ± 0.25 mm

NON-SHIELDED RJ45
 SIDE ENTRY PCB JACK

SoniTexx®