



TOLERANCE (公差):
 0.000 mm $\pm$ 0.075 mm
 0.00 mm $\pm$ 0.15 mm
 0.0 mm $\pm$ 0.25 mm

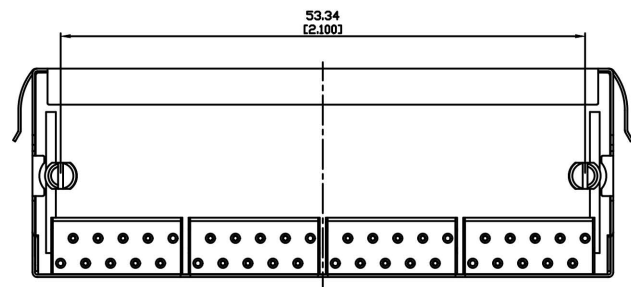

Electrical Characteristics :
 Insulation Resistance : 500M Ω Min.
 Contact Resistance : 30m Ω Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:

Housing : Thermoplastic UL94V-0



Contact : Full Gold Plating

Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel

Shield : Brass, Nickel Plating.

PART NO : 8 2 0 8 S- B *** - 3

Positions
 Contacts
 Panel Ground
 Non : Non Panel Ground
 U : Top With Panel Ground
 D : 2 Sides With Panel Ground
 S : 3 Sides With Panel Ground
 Housing Color
 B : Black
 Gold Plated
 0 : Gold Flash
 1 : 6u"
 2 : 15u"
 3 : 30u"
 4 : 50u"

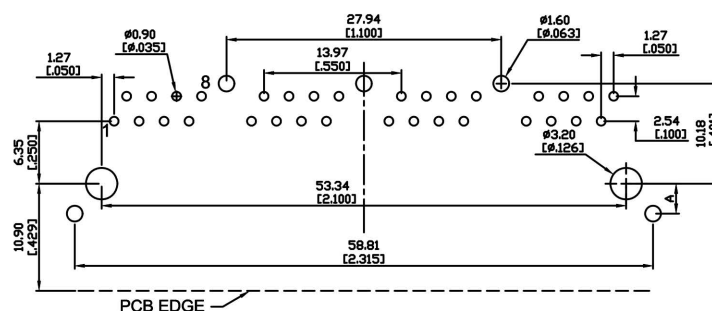

SUGGESTED PCB LAYOUT
 TOP VIEW

SHIELDED RJ45
 SIDE ENTRY PCB JACK

SoniTexx