

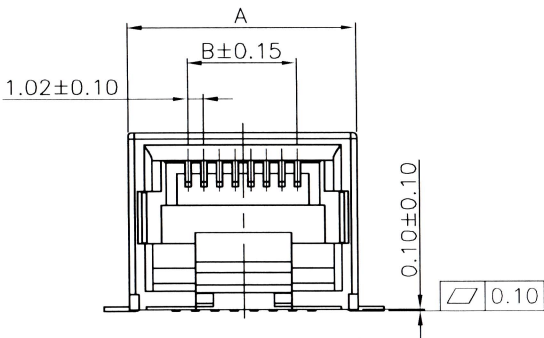
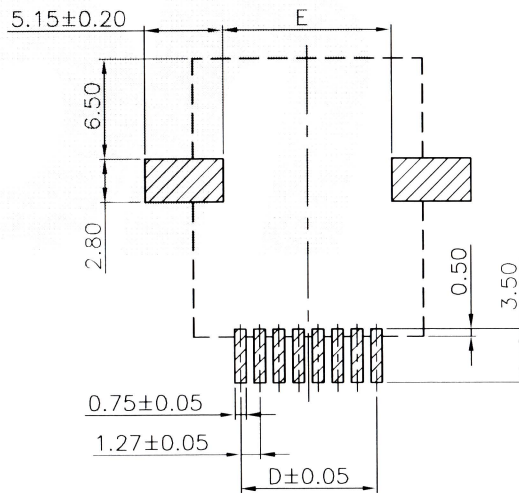


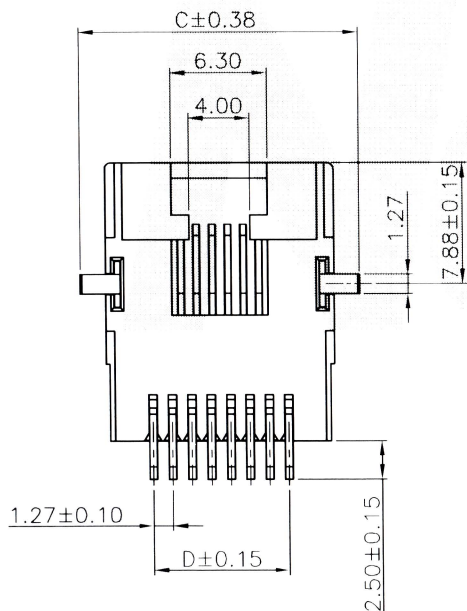


GENERAL TOLERANCE:

.X=±0.20

.XX=±0.15

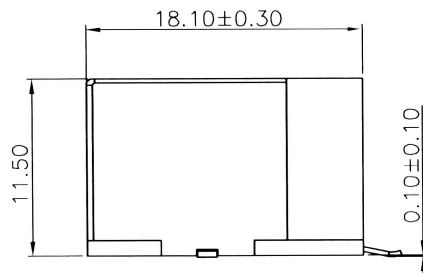

Recommended P.C.B Layout



Specifications:

Current Rating:1.5A

Voltage Rating:125V

Contact Resistance:20m ohm. Max.

Insulation Resistance:500M ohm. Min.

Withstanding Voltage:1000V AC For One Minute

Operating Temperature Range:-40°C To +80°C

Materials:

Insulator:High Temp. Plastic(Nylon 6T UL94V-0)

Insulator Color:Black

Contact:Phosphor Bronze

Plating:Selected Gold Plated

How To Order

5001-XPXC-SM-MP

Metal Tab

SMD Type

No. Of Positions

Dimension:

Circuits	Dim A	Dim B	Dim C	Dim D	Dim E
10	15.00	9.18	18.30	11.43	11.00
08	15.00	7.14	18.30	8.89	11.00
06	12.96	5.10	16.30	6.35	9.00
04	11.20	3.06	14.50	3.81	7.00