

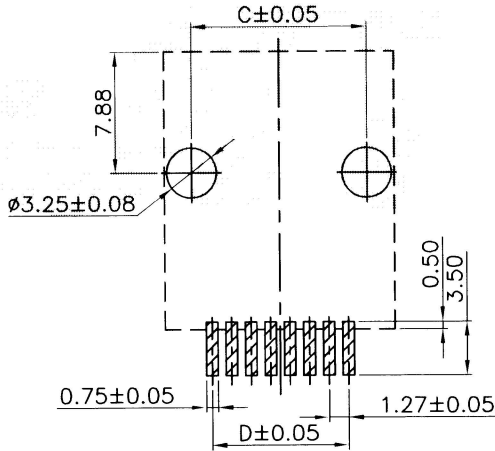
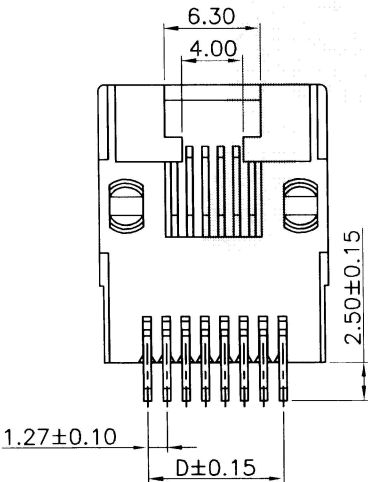
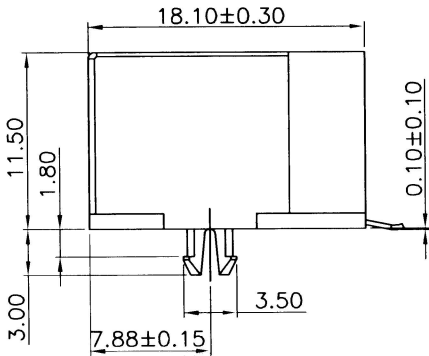


GENERAL TOLERANCE:

.X=±0.20
.XX=±0.15

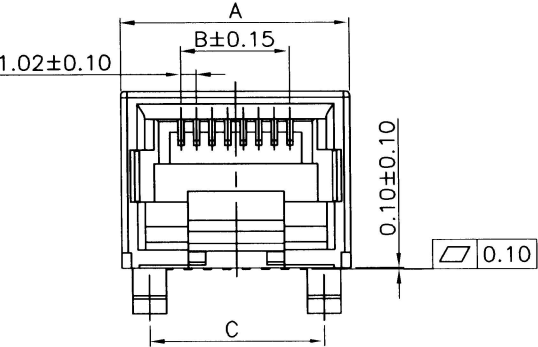

Recommended P.C.B Layout



Specifications:

Current Rating:1.5A
Voltage Rating:125V
Contact Resistance:20m ohm. Max.
Insulation Resistance:500M ohm. Min.
Withstanding Voltage:1000V AC For One Minute
Operating Temperature Range:-40°C To +80°C
Materials:

Insulator:High Temp. Plastic(Nylon 6T UL94V-0)
Insulator Color:Black
Contact:Phosphor Bronze
Plating:Selected Gold Plated
How To Order

5001-XPXC-SM
SMD Type
No.of Positions

Dimension:

Circuits	Dim A	Dim B	Dim C	Dim D
10	15.00	9.18	11.43	11.43
08	15.00	7.14	11.43	8.89
06	12.96	5.10	10.16	6.35
04	11.20	3.06	7.62	3.81