

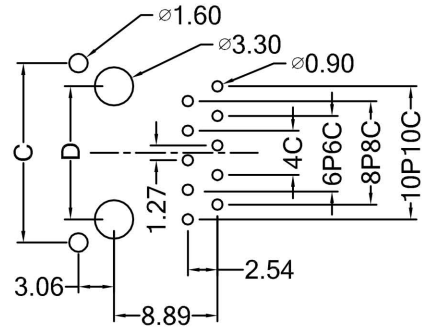

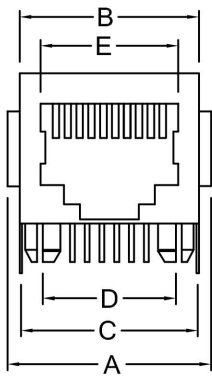




PCB LAYOUT / TOP VIEW



position	conductor	A	B	C	D	E
6P	2C/4C/6C	15.60	13.65	13.40	10.16	9.90
8P	8C	17.40	15.50	15.40	11.43	11.85
10P	10C	17.40	15.50	15.40	11.43	11.85

UNIT: m / m TOL.: +/- 0.15

MATERIAL & FINISH

Housing & Insert: PBT. UL94V-0, black
Conductor: 0.35 × 0.42 mm phosphor bronze,
Plating: Gold plated over nickel on contact area,
Tin plated over nickel on solder area.
Shield: Bronze with nickel plated.
Temperature: -40°C to 70°C
Mating Cycle: 750 cycles min.
RoHS Compliance

ELECTRICAL:

Voltage Rating : 125 V
Current Rating : 1.5 A
Contact Resistance : 30 milliohms max.
Dielectric Withstanding Voltage : 1000 V
Insulation Resistance : 500 megaohms min.

ORDERING INFORMATION

C285 **a** **b** **c** **d** **e**
E — housing color
(BK) black
position — gold plating
(6P,8P or 10P) (06,15,30 or 50) u"
contact — (2C,4C,6C,8C or 10C)