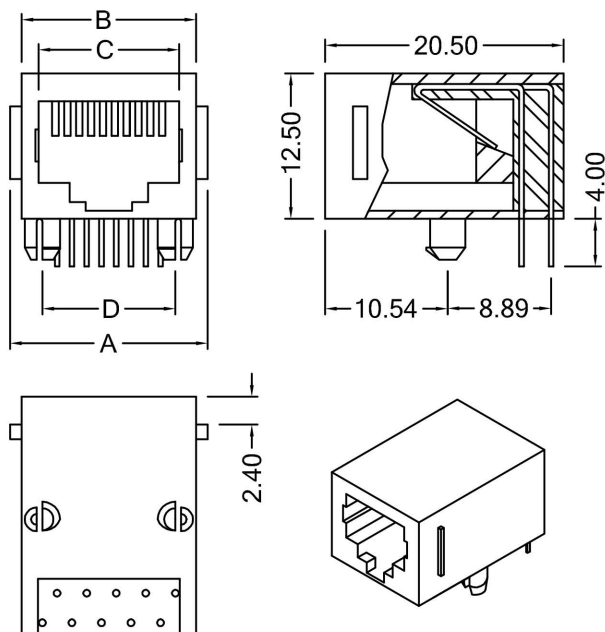


PCB LAYOUT / TOP VIEW

position	contact	A	B	C	D
4P	4C	13.70	11.20	7.95	7.62
6P	2C/4C/6C	15.60	13.20	9.90	10.16
8P	4C/6C/8C	17.40	15.00	11.90	11.43
10P	10C	17.40	15.00	11.90	11.43

UNIT: m / m
TOL.: +/- 0.15

MATERIAL & FINISH

Housing & Insert: PBT. UL94V-0, black
Conductor: 0.35 × 0.42 mm thickness phosphor bronze,
Plating: Gold plated over nickel on contact area,
Tin plated over nickel on solder area.
Temperature: -40°C to 70°C
Durability: 750 cycles min.

ELECTRICAL

Voltage Rating : 125 V
Current Rating : 1.5 A
Contact Resistance : 30 milliohms max.
Insulation Resistance : 500 megaohms min.
Dielectric Withstanding Voltage : 1000 V

ORDERING INFORMATION

290 **a** **b** **c** **d** **e** (**f**)
 panel stop (E or N)
 position (4P,6P,8P or 10P)
 contact (2C,4C,6C,8C or 10C)
 gold plating (06,15,30 or 50)
 optional (K, D,) housing color (BK), black

