

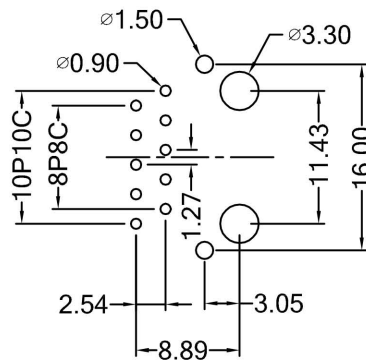
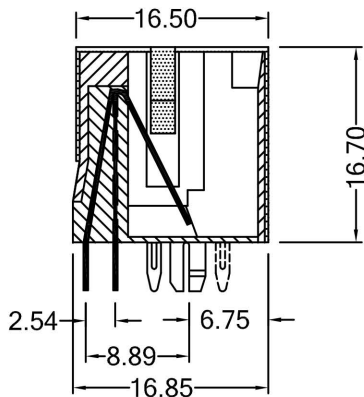
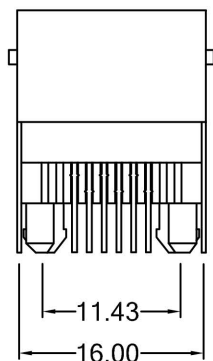
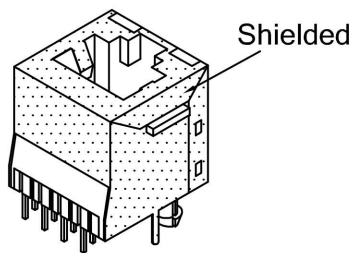




PCB LAYOUT / TOP VIEW / R3.05

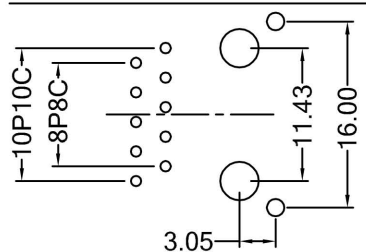

PCB LAYOUT / TOP VIEW / F3.05

MATERIAL & FINISH

Housing & Insert: PBT. UL94V-0, black
 Conductor: 0.35 mm thickness phosphor bronze,
 Gold plated over nickel on contact area,
 Tin plated over nickel on solder area.

Shield: Bronze plated nickel.

Temperature : -40 to 70 °C

Durability : 750 cycles min.

ELECTRICAL

UNIT: m / m
 TOL.: +/- 0.15

Voltage Rating : 125 V
 Current Rating : 1.5 A
 Contact Resistance : 30 milliohms max.
 Insulation Resistance : 500 megaohms min.
 Dielectric Withstanding Voltage : 1000 V

ORDERING INFORMATION

S260 **a** **b** **c** **d** **e** (**f**)
 panel stop (N or E) position (8P or 10P)
 contact (8C or 10C) gold plating (06,15,30 or 50) u"
 tabs (R3.05 or F3.05)
 housing color (BK) black

