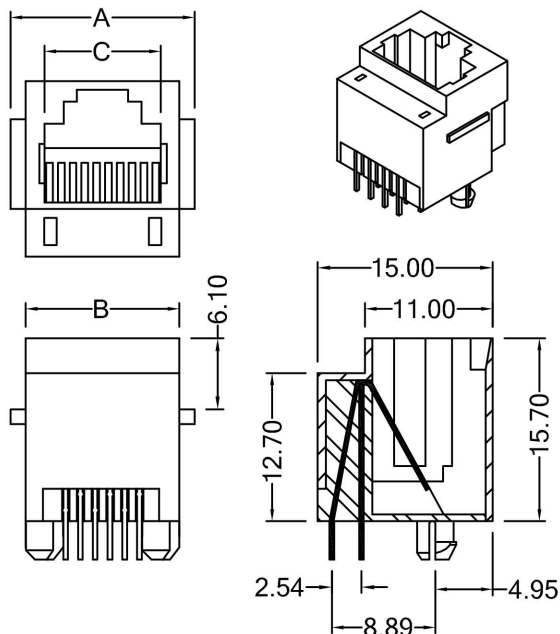


PCB LAYOUT / TOP VIEW

position	conductor	A	B	C	D
4P	4C	13.70	11.20	7.90	7.62
6P	2C/4C/6C	15.70	13.20	10.00	10.16
(8P)6P	2C/4C/6C	17.70	15.20	10.00	11.43
8P	8C	17.70	15.20	11.80	11.43
10P	10C	17.70	15.20	11.80	11.43

UNIT: m / m
TOL.: +/- 0.15

MATERIAL & FINISH

Housing & Insert: PBT. UL94V-0, black
 Conductor: 0.35 × 0.42 mm thickness phosphor bronze,
 Plating: Gold plated over nickel on contact area,
 Tin plated over nickel on solder area.
 Temperature: -40°C to 70°C
 Durability: 750 cycles min.

ELECTRICAL

Voltage Rating : 125 V
 Current Rating : 1.5 A
 Contact Resistance : 30 milliohms max.
 Insulation Resistance : 500 megaohms min.
 Dielectric Withstanding Voltage : 1000 V

ORDERING INFORMATION

266 **a** **b** **c** **d** **e** (**f**)
 panel stop (N or E)
 position (4P,6P,8P or 10P)
 contact (2C,4C,6C,8C or 10C)
 optional with keyway
 housing color (BK) black
 gold plating (06,15,30 or 50) u"

