

SPECIFICATION

Current Rate:2 AMP
 Insulation Resistance:1000M Ω Min.
 Contact Resistance:20m Ω Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105 °C

MATERIAL



Insulator Material:High Temperature Thermoplastic, UL 94V-0
 Terminal: Copper Alloy

ORDER INFORMATION

S 2 F S 9 4 - 4 X X X B X X X -XXX - U

©:Standard Recommend

No. of contacts per row (02-40)	ⓄG:Gold Flash	S:Selective	B:Black insulator	1:With Additional Plastic 2:W/O Additional Plastic (For 1215 Only)	300:Dim A 3.0mm 1215:Dim A 12.15mm
	GA:5u"	SA:5u"			
	GB:10u"	SB:10u"	ⓄT:Tube TR:Tray	1:With Tail Shroud 2:W/O Tail Shroud (For 1215 Only)	
	GC:20u"	SC:20u"			
	GD:30u"	SD:30u"			
	T:Tin Plated				
	TE:Tin 200u"				

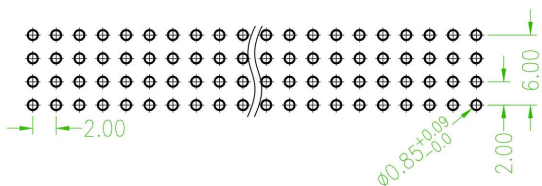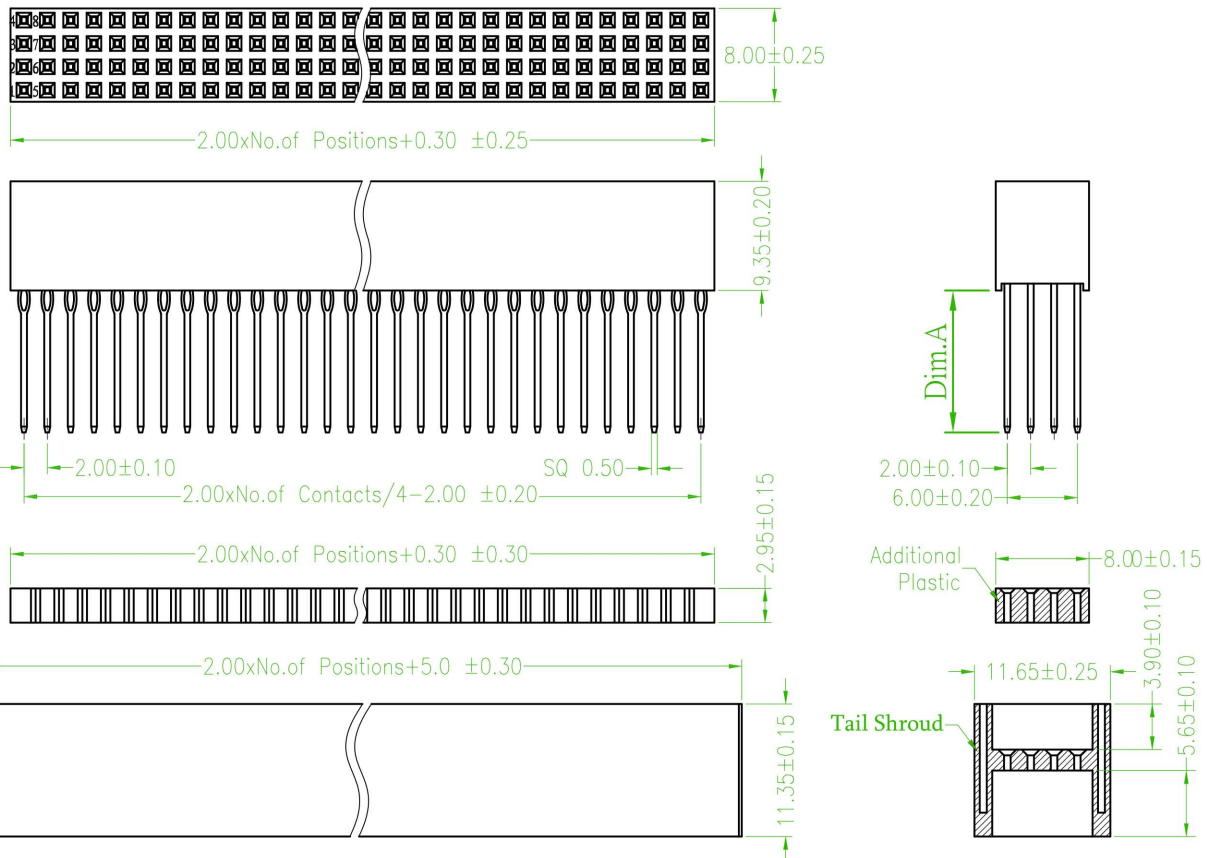

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE ± 0.05)

	品名 TITLE	FEMALE HEADER 2.0mm PLASTIC HEIGHT 9.35mm STRAIGHT PRESS FIT				
	品號 PART NO.	S2FS94-4XX-XXX-U			日期 DATE	2009/03/05
	圖號 DRAWING NO.	S2FS94-4XX-XXX-U	版本 REV.	A	繪圖 DRAWN	Joe
	客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED	Paul
	公差 TOLERANCE	.X ± 0.40 .XX ± 0.25	單位 UNIT	mm	核准 APPROVED	James

		DESCRIPTION	DATE