

Notes:





1. Insulator: Thermalplastic PA66+30% G/F
UL94V-0, Nature
2. Terminal: Phosphor bronze
Finish: Tin plated 120u" min. overall
3. Applicable wire : AWG 22~24
Max. insulator Diameter 1.7mm

Ordering Information:



2514S** H 0 **
1 2 3 4

1. No. of circuits
2. H: Without lock
3. Plating:
0= Tin plated 120~200u" over Ni 30u" overall.
U= Gold Flash over Ni 80~150u" overall.
4. See the Table of next page.


RoHS COMPLIANT

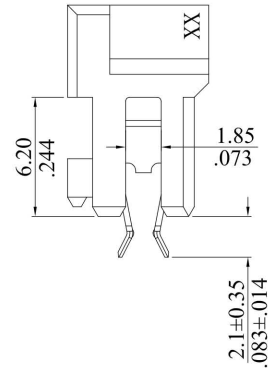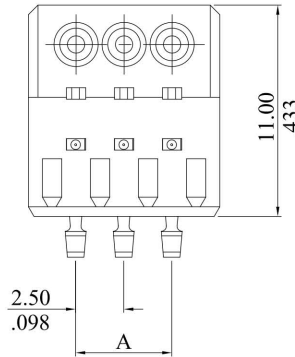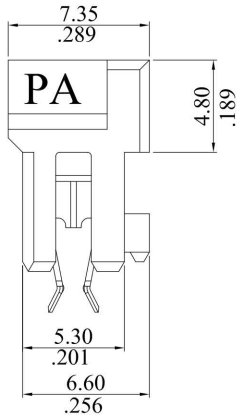

A=2.50*(No. of circuit-1)
B=A+5.0

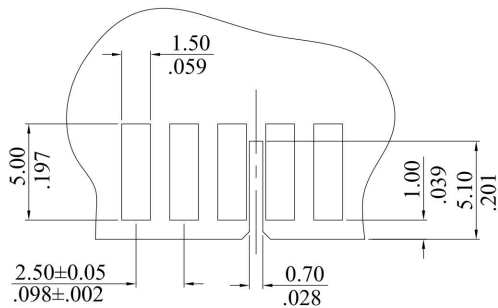

PCB Layout

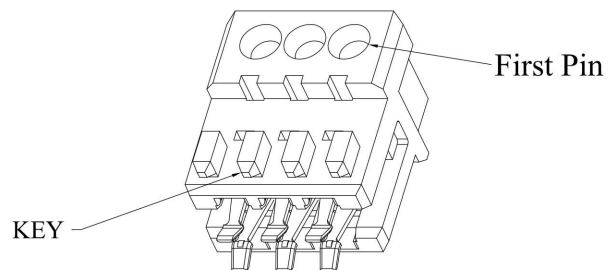**SoniTexx®**GENERAL TOLERANCES:
(UNLESS SPECIFIED)

	mm	inch
1 PLACE	± 0.30	± — —
2 PLACES	± 0.20	± .012
3 PLACES	± 0.10	± .008
4 PLACES	± — —	± .004

ANGULAR ±1°

APPROVED:


DATE:

CHECKED:

DATE:

DRAWN:

DATE:



PART NO.:

2514S**H***

TITLE:

Socket

DRAWING NO.:

251402S

UNITS

mm

SCALE

1:1

SIZE

A4

SHEET

1/3

REV.

B

B	ES110215		
A	DWG REL		
REV.	ECO. NO.	CHG.	APP.

TYPE	0A
KEY/LOCK	

RoHS COMPLIANT

TYPE	0A	0B	0C	LA	LB
KEY/LOCK					

TYPE	0A	LA	LB	LC
KEY/LOCK				

TYPE	0A	LA	LB	LC	LD
KEY/LOCK					

TYPE	0A	LA	LB	LC
KEY/LOCK				

LD	LE
	

TYPE	0A	LA	LB	LC
KEY/LOCK				

LD	LE	LF
		

TYPE	0A	LA	LB	LC
KEY/LOCK				

LD	LE	LF	LG
			

SoniTexx®

GENERAL TOLERANCES:
(UNLESS SPECIFIED)

	mm	inch
1 PLACE	± 0.30	± — —
2 PLACES	± 0.20	± .012
3 PLACES	± 0.10	± .008
4 PLACES	± — —	± .004

ANGULAR ±1°

APPROVED:


DATE:

CHECKED:

DATE:

DRAWN:

DATE:



UNITS

mm

PART NO.:

2514S**H***

TITLE:

Socket

DRAWING NO.:

251402S

SCALE

1:1

SIZE

A4

SHEET

2/3

REV.

B

B	ES110215		
A	DWG REL		
REV.	ECO. NO.	CHG.	APP.

A

B

C

D

E

A







B



C

D




E

RoHS COMPLIANT

TYPE	0A	LA	LB
KEY/LOCK 9-way			
	LC	LD	LE
			
	LF	LG	LH
			

TYPE	0A	LA	LB
KEY/LOCK 10-way			
	LC	LD	LE
			
	LF	LG	LH
			
	LI		
			

For example:

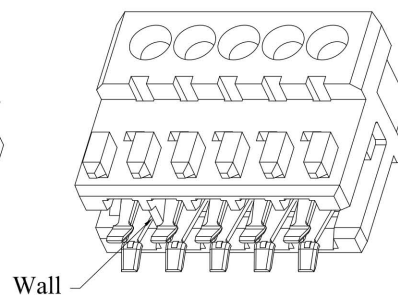

				SoniTexx®	APPROVED:		PART NO.:				
					DATE:		2514S**H***				
					GENERAL TOLERANCES: (UNLESS SPECIFIED)		CHECKED:		TITLE: Socket		
B	ES110215				mm	inch	DATE:		DRAWING NO.:		
				1 PLACE	± 0.30	± — —					
A	DWG REL			2 PLACES	± 0.20	± .012	DRAWN:		251402S		
				3 PLACES	± 0.10	± .008					
				4 PLACES	± — —	± .004					
REV.	ECO. NO.	CHG.	APP.	ANGULAR ±1°			UNITS	SCALE	SIZE	SHEET	REV.
							mm	1:1	A4	3/3	B

1

2

3

4