



USB 3.0 Male Solder B Type



Product Specification:

- 1.1 Current rating:1 A Max.
- 1.2 Dielectric withstanding voltage:500 V(ac) for 1minute.
- 1.3 Contact resistance: 30 mw Max.
- 1.4 Insulation resistance:1000 MW Min at DC 500v.
- 1.5 Temperature range:-55°c~+105°c.

ITEM	TITLE	MATERIAL	PLATING
1.	Contact A (5 Pin)	Brass-EH	Selective Plated 1 U*
2.	Top Cover	PBT+30%G.F	
3.	Bottom Cover	PBT+30%G.F	
4.	Contact B (5 Pin)	Brass-EH	Selective Plated 3 U*
5.	Housing	PBT+30%G.F	
6.	Front Shell	SPCC	Nickel Plated
7.	Rear Shell	SPCC	Nickel Plated

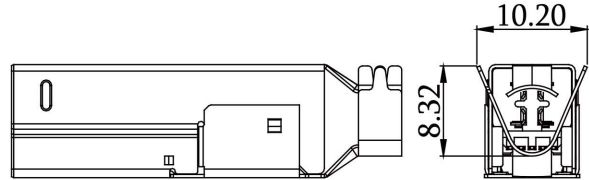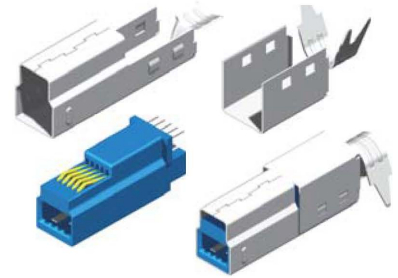

Part No.:USB-MSLA-BU-3.0-L

