

DO NOT SCALE DRAWING

RoHS COMPLIANT

REVISIONS

REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE
A		ISSUE A	JASON MENG	2009-05-06

J21815-1BM4 XX XXX $\frac{x}{2}$ K $\frac{x}{3}$

1.PLATING:

- 11-FLASH.GOLD IN CONTACT AREA
- 12-3U" MIN.GOLD IN CONTACT AREA
- 13-5U" MIN.GOLD IN CONTACT AREA
- 14-10U" MIN.GOLD IN CONTACT AREA
- 15-15U" MIN.GOLD IN CONTACT AREA
- 16-20U" MIN.GOLD IN CONTACT AREA
- 17-30U" MIN.GOLD IN CONTACT AREA

2."R":RoHS; "G":GP; "B":无卤素; "H":REACH;
"S":POHS; "P":Prop65; "U":EUP

3.PACKING: A-TUBE WITHOUT CAP
C-TRAY WITHOUT CAP
E-REEL WITH CAP

POS.	Part No.	DIMENSIONS				Terminal1	Terminal2
		A	B	C	D	POS.	POS.
05	1BM4XX010xKX	15.5	13.0	8.00	14.25	2	3
06	1BM4XX005xKX	17.5	15.0	10.00	16.25	2	4
07	1BM4XX011xKX	19.5	17.0	12.00	18.25	2	5
08	1BM4XX012xKX	21.5	19.0	14.00	20.25	2	6
09	1BM4XX013xKX	23.5	21.0	16.00	22.25	2	7
10	1BM4XX014xKX	25.5	23.0	18.00	24.25	2	8

4	Board lock	Brass C2680R-H	Tin Plated	58081211-01
3	Terminal2	Brass C2680R-H	Gold Plated	38090327-02
2	Terminal1	Brass C2680R-H	Gold Plated	38090327-01
1	Housing	NY9T	Black	UL 94V-0 28090327-01
NO. DESCRIPTION		MATERIAL	COLOR	REMARK
				DWG. NO.

DIMENSIONS:
☐ MM [INCH] ☐ INCH [MM] ☒ MM ONLY

UNLESS OTHERWISE SPECIFIED,
GENERAL TOLERANCE:

DECIMALS ANGLES
X. ± 0.38 [0.015] X" $\pm 3^\circ$
.X ± 0.25 [0.010] .X" $\pm 1.0^\circ$
.XX ± 0.13 [0.005]

CAD GENERATED DRAWING,
DO NOT MANUALLY UPDATE

THIRD ANGLE PROJECTION



SoniTexx®

TITLE BATTERY Male R/A DIP Type I(Ph=2.00mm H=3.30mm)





PART NO. J21815-1BM4XXXXXXKX APPROVED BY JASON MENG

DRAWING NO. J21815-1BM4XXXXXXKX CHECKED BY STEVEN LIU

MATERIAL DRAWN BY Darren Xia




FINISH GENERATD DATE 2009-05-06

SCALE SHEET REV. SIZE: A4
FREE 1/1 A FILE NO.:JJP-A-05-003

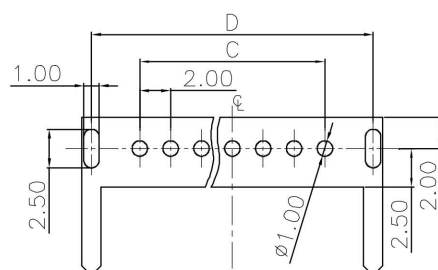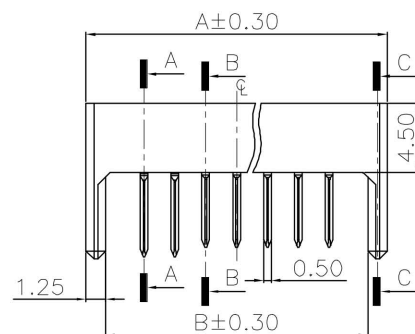


P.C.B LAYOUT(TOLERANCES:±0.05)

P.C.B THICKNESS:1.00mm

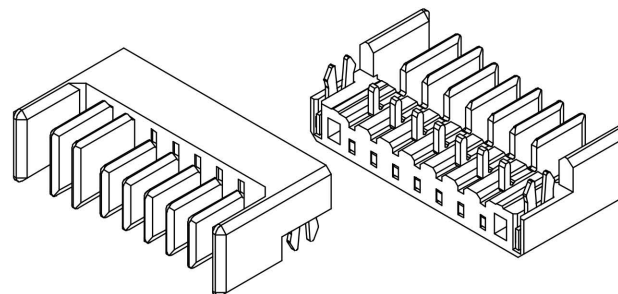

SECTION B-B

SECTION A-A



SECTION C-C